



VERSOPHORM GENERAL SUPPLY

GENERAL CATALOGUE HORECA & HEALTHCARE

Footwear & Foot Care | Sports & Specialty Flooring |
Accommodation Equipment & Appliances | Technical Products

**We never stop
improving**

Footwear & Footcare

Single-use Flip-Flops



0909 00XX

Disposable Flip-Flops - CUSTOMISABLE

Universal sizes: Women - 22.5cm / Men - 27cm
Thickness options: 3, 4, or 5 mm. Available in multiple colors. Ideal for saunas, spas, salons, beauty & medical centers. Lightweight, compact, no special storage needed. Foldable, water-resistant, and shape-retaining in moisture or heat. Print customization options and colors - upon request

Sandals for Men




Extremely lightweight men's sandals, available in various colors



Bicolor Clogs for Women



Low sole with multiple color combinations

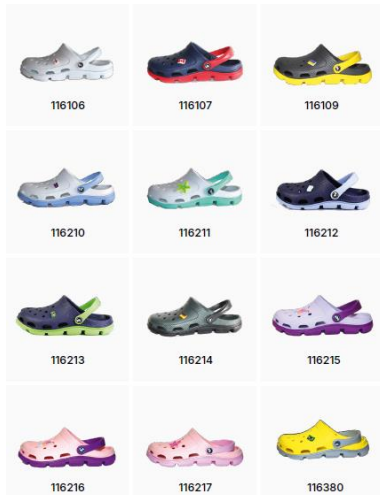

Toe separators for Pedicure



0910 0001

Toe Separators

A must-have for pedicure procedures. They keep toes apart for even gel polish application and drying. Made from lightweight, flexible, eco-friendly, hypoallergenic EVA. Odorless and safe for skin. Ideal for professional salon use.

Superb Clogs for Women



Women's clogs in multiple colors with various jewelry accents



Bicolor Clogs for Men



Low sole with multiple color combinations



Lightweight footwear



Ballet shoes for Woman

Extremely lightweight and elegant women's ballet flats, available in multiple colors



High sole Clogs for Women



Modern look Women's clogs in multiple colors with various jewelry accents



ON REQUEST CUSTOMISABLE



CLOGS FOR STAFF AND MEDICAL PROFESSIONALS



COMFORTABLE SHOES FOR WORK

Flooring and sitting

Yoga mats



8000 0001

Sports Mats from Durable, Wear-Resistant EVA Material - 1850×550×3 mm
Made from an eco-friendly material that absorbs impact and cushions your movements. Ideal for yoga, pilates, and aerobics.
The mat offers high comfort and safety. Its rubberized surface doesn't slip, stretch, or slide on the floor. Even intense exercises and stretches can be performed confidently and effectively. The mat is double-sided, with anti-slip texture embossed on both sides (colors on request)



Tourist seat pads




808000XX

Universal Seat Pad - a must-have for hiking, picnics, hunting, or fishing. Made of eco-friendly EVA, it offers excellent insulation and cushioning, protecting you from cold and moisture. Lightweight, waterproof, durable, and easy to carry or attach to a belt - ideal for any outdoor activity.



Playground puzzle mats

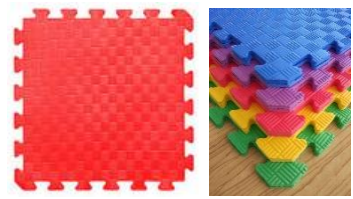

2525XXXX

Soft Puzzle Mat 50×50×1 cm - eco-friendly flooring for gyms and kids' training areas. Textured surface ensures grip, while interlocking "dovetail" edges allow easy assembly of any size or shape without gaps. Available in multiple colors.



Tatami puzzle mats



4404XXXX

Tatami - eco-friendly flooring for gyms and rings. Double-sided, dual-color mat, made of EVA foam polymer.

Textured surface enhances grip for athletes' feet.
New Anti-Slide embossing further improves traction and prevents slipping.

Material: Dual-layer EVA (ethylene-vinyl acetate)
Color: Blue/Red
Size: 100 x 100 cm
Thickness: 40 mm (Optional: 20/ 26/ or 30 mm)
Density: 100 kg/m³
Hardness: 30 Shore A
Weight: 4.1 kg



Customized door mats



5500XXXX

EVA Doormats

Trap dirt, dust, and moisture with honeycomb design. Made from eco-friendly, odorless EVA — safe for kids and pets.

Benefits:

Durable: Keeps shape after bending.
Weatherproof: Resists water, temperature shifts, and wear.
Absorbent: Holds up to 1.5L of moisture.
Easy Care: Shake, rinse, or wipe.
Custom Colors & Sizes.
Long-Lasting: Tear- and chemical-resistant.



Cat litter mats

9521XXXX



Car litter mat

Your pet's paws will always stay clean. Litter, sand, and liquids are trapped inside the mat thanks to its hole-patterned, dual-layer design. Debris can then be easily emptied from the pocket. The mat is easy to clean, non-slip, and offers good thermal insulation.

Deck covering

Decking Sheets

Two-layer 1200×2100×6 mm EVA sheets with suede-textured surface. Ideal for boats, kayaks, jet skis, SUPs and even wet floors.
Customizable: Choose density, hardness, thickness, and color
Cutter/engraver-friendly: Add logos and patterns
Soft, waterproof, UV & oil resistant
Excellent grip (wet/dry), shock absorption, and noise insulation
Easy to clean, no drilling needed for install
Safe, odor-free, teak-like finish for a premium marine look



ON REQUEST

2 100 MM



Flooring insulation

EVA insulations sheets

offer an excellent sound, moisture, shock, and thermal insulation. With a 26 dB noise reduction index, it dampens footsteps and absorbs impact. Its dense, waterproof structure eliminates the need for vapor barriers. Ideal for both floors and walls.

ON REQUEST



Air Conditioning

Thermostat's

Well



Digital Room Thermostat

LCD display with white backlight
Thermosensitive element: NTC 10KΩ
Switching sensitivity: $\pm 0.5^{\circ}\text{C}$
Contact rating: 0.5A resistive, 0.2A inductive load
Voltage coupling: 24V AC/DC, ... 250V AC
Control temp range: $5\text{--}30^{\circ}\text{C}$, increments 0.5°C
Ambient temp range: $0\text{--}50^{\circ}\text{C}$
Display temp precision: $\pm 1^{\circ}\text{C}$
Antifreeze temp: 5°C
Power supply: 2x AAA alkaline battery (not incl)
Relative humidity: 0.85
Protection class: IP30
Housing: ABS + PC



THERMS-THERMAL-WL

Well



Wi-Fi Programmable Thermostat

LCD display with white backlight
Programmable: 5+1+1 day (4 periods/day)
Thermosensitive element: NTC 10KΩ
Switching sensitivity: $\pm 0.5^{\circ}\text{C}$
Contact rating: 10A resistive, 3A inductive load
Voltage coupling: 24V AC/DC, ... 250V AC
Control temp range: $5\text{--}30^{\circ}\text{C}$, increments 0.5°C
Ambient temp range: $0\text{--}50^{\circ}\text{C}$
Display temp precision: $\pm 1^{\circ}\text{C}$
Antifreeze temperature: 5°C
Power supply: 2x AAA alkaline battery (not incl)
Relative humidity: 0.85
Protection class: IP30
Housing: ABS + PC
Transmission distance: 120M in open space



THERMS-THERMALWP-WL

Well



Wi-Fi Digital Thermostat

LCD display with white backlight
Thermosensitive element: NTC 10KΩ
Switching sensitivity: $\pm 0.5^{\circ}\text{C}$
Contact rating: 10A resistive, 3A inductive load
Voltage coupling: 24V AC/DC, ... 250V AC
Control temp range: $5\text{--}30^{\circ}\text{C}$, increments 0.5°C
Ambient temp range: $0\text{--}50^{\circ}\text{C}$
Display temp precision: $\pm 1^{\circ}\text{C}$
Antifreeze temp: 5°C
Power supply: 2x AAA alkaline battery (not incl)
Relative humidity: 0.85
Protection class: IP30
Housing: ABS + PC
Transmission distance: 120M in open space



THERMS-THERMALW-WL

Weather Stations

Well



Digital Indoor Thermohygrometer

Displays: Temperature, humidity, current time
Recording min/ max values
Alarm and Snooze function
 $^{\circ}\text{C}/^{\circ}\text{F}$
selectable
Battery: 2x AAA (not incl)
Installation: on the wall/ on the table



THERM-IND-MOOD-WL

Well



Digital Indoor/ Outdoor Thermometer

Displays: Temperature, current time
Recording min/ max values
Alarm and Snooze function
 $^{\circ}\text{C}/^{\circ}\text{F}$
selectable
Battery: 2x AAA (not incl)
Installation: on the wall/ on the table
Package content: digital thermometer, wireless sensor,



THERM-OUTD-SENSE-WL

Well



Wi-Fi Digital Weather Station

Displays: Temperature, humidity, current time, calendar
Recording min/ max values
Weather forecast function
Alarm and Snooze function
 $12/24$ hour & $^{\circ}\text{C}/^{\circ}\text{F}$ selectable
Battery: 2x AAA (not incl)
Installation: on the wall/ on the table
Package content: digital weather station, wireless sensor



WTST-OUTD-ORACLE-WL

Air Conditioning

Fan's

Well



Table Fan

Diameter: 43 cm, Power: 45W
Power supply: 230V ~ 50 Hz
3 speed: 950RPM- 1100RPM- 1250RPM
Color: White, Oscillation: 90 °
Noise level: <65 dB
Mesh grill
IP 20; Protection class: II



FAN-DESK-FROSTY-WL

Well



Table Fan

Diameter:
34 cm, Power: 40W
Voltage: 230V~
50
Hz
3 speed : 950RPM- 1100RPM- 1250RPM
Color: White, Oscillation: 90°
Noisy level: <65 dB
Mesh grill
IP 20;
Protection class: II



FAN-DESK-ICY-WL

Well



Table Fan

Diameter:
27 cm, Power: 30W
Voltage: 230V~
50
Hz
2 speed : 1800RPM- 2200RPM
Color: White, Oscillation: 90°
Noisy level: <65 dB
Mesh grill
IP 20;
Protection class: II



FAN-DESK-WINDY-WL

Well



Standing Fan

Diameter: 40 cm; Power: 45W
Voltage: 230V; Frequency: 50 Hz
3 speed; Color: white
Cross base: 60* 60 cm
Height: 1.1M - 1.3M
Oscillation: 90 degree
Noisy level: <65 dB
Mesh grill



FAN-STAND-BREEZE-WL

Well



Standing Fan & RC

Diameter:
43 cm, Power: 45W
Voltage: 230V~
50Hz
3
speed : 950RPM- 1100RPM- 1250RPM
Color: black; Cross base: 60* 60 cm
Height: 1.1M- 1.3M
adjustable
Oscillation: 90°, Noisy level: <65 dB
Mesh grill
IP 20;
Protection class: II



FAN-STAND-FREEZE-WL

AC Accessories

Well



Wi-Fi Smart Universal AC Remote Control

Directly & remotely control almost all air conditioner models. With AirGO you have true remote & smart control.

The built-in backlight & LED light
Built-in rechargeable lithium battery
USB charger: 5V 500mA
Rechargeable lithium battery: 500mAh 3.7V
RC range: 8M
Supports 2G/ 3G/ 4G/ WiFi networks



RC-AC/WF-AIRGO-WL

Well



Universal AC Remote Control

2 setting modes: manual programming, and automatic search programming
Timer on/ off, Flashlight function
"Intelligent cool" function (immediate cooling)
"Intelligent heat" function (immediate heating)
Buttons for temperature adjustment



RC-AC-AIRLOAD-WL

Well



Universal AC Remote Control

It is compatible with almost all brands of air conditioners
Power: Battery AAA x 2 (not incl)
Possibility of manual & automatic programming



RC-AC-WINDY-WL

Air Conditioning

Heaters

Well



Quartz Radiator

Voltage: 230V
Maximum power: 800W
2 heating power: 400/800W
Tip-Over Switch
Quartz Heating Tube
Portable carry handle



HTR-QRZ-800-WL

Well



Convection Heater

Voltage: 230V
Maximum power: 2000W
3 heating power: 750/1250/2000W
Variable thermostat
Over-heat Protection system
Electric Wire Heating Element
Portable carry handle
Fast heating up, Free standing



HTR-CNV-2000-WL

Well



Portable Oil Radiator

Voltage: 230V
Maximum power: 2000W
3 heating power: 700/1300/2000W
Adjustable thermostat control
Over-heat Protection system
Indicator lights
Tip-over safety switch
Smooth castors for easy movement
With cord storage
Double-welded Fin
Fin size: 125x570mm

Maximum power: 2000W
3 heating power: 700/1300/2000W
Number of fins: 9



HTR-OIL-2000/9-WL

Well



Portable Oil Radiator

Voltage: 230V
Maximum power: 2000W
3 heating power: 700/1300/2000W
Adjustable thermostat control
Over-heat Protection system
Indicator lights
Tip-over safety switch
Smooth castors for easy movement
With cord storage
Double-welded Fin
Fin size: 125x570mm

Maximum power: 2000W
3 heating power: 700/1300/2000W
Number of fins: 9



HTR-OIL-2000/9-WL

Maximum power: 2500W
3 heating power: 850/1650/2500W
Number of fins: 11



HTR-OIL-2500/11-WL

Maximum power: 3000W
3 heating power: 1000/2000/3000W
Number of fins: 13



HTR-OIL-3000/13-WL



Faucet's

Electrical Faucet's

Well



Instant Heating Electric Faucet

Warm water only in 5 seconds! Without preheating to avoid energy wasting!

Voltage: 220-240V, Rated Power: 3000W

Protection: IPX4, Water pressure: 0.04-0.5MPa

Heating Element material: Stainless Steel #304

Capacity Flow of hot water: 2-2.5 L/min

Hot water temperature: 30-60°C

Rotation: 360°, Power Cord Length: 1.1M

Long lifetime: > 10,000h

Over-Heat Protection



FCT-EL-SPLASH-WL

Well



Instant Heating Electric Faucet

Voltage: 220-240V, Rated power: 3000W

Protection factor: IPX4, Water pressure: 0.04-0.5MPa

Heating material: Stainless steel # 304

Hot water flow: 2-2.5 L / min

Hot water temperature: 30-60 °C

Rotation: 360°, Power cable length: 1.1M

Long lifetime: > 10,000h

Protection against overheating

Can be mounted horizontally (on the wall)



FCT-EL-TORRENT-WL

Well



Instant Heating Electric Faucet

Warm water only in 5 seconds! Without preheating to avoid energy wasting!

Voltage: 220-240V, Rated power: 3000W

Protection factor: IPX4

Water pressure: 0.04-0.5MPa

Heating material: Stainless steel # 304

Hot water flow: 2-2.5 L / min

Hot water temperature: 30-60 °C

Rotation: 360°, Cable length: 1.1M

Protection against overheating



FCT-EL-HOTSPRING-WL

Well



Instant Heating Electric Faucet LED Display

Voltage: 220-240V, Rated Power: 3000W

Protection: IPX4

Water pressure: 0.04-0.5MPa

Heating Element material: Stainless Steel # 304

Flow capacity of hot water: 2-2.5 L / min

Hot water temperature: 30-60 °C

Rotation: 360°, Cable length: 1.1M

Long lifetime: > 10,000h

Over-Heat Protection



FCT-EL-WATERFALL-WL



Temperature Control

Controllers

Well



Controller MPPT, Solar Charging

- Automatic identification of voltage
- Advanced MPPT algorithms
- Intelligent load management
- PWM control technology
- Synchronized rectification
- Perfect protection functions
- Digital control, Smart alarm
- Digital display
- Online adjustment of load parameters
- Intelligent communication interface



CONTR-SOL-MPPT1224/20-VL



Blender

Blender

Well



Blender

Input voltage: 230V 50Hz

Nominal power: 600W

Functions: Blending, mixing, Smoothie, Ice crushing

2 speeds control with pulse function

1.5L glass jug

6 leaves stainless steel blade

Shining Aluminum rotary knob

Anti-slip suction feet

Overheating protection



BLENDER-AROMA-WL



Personal Scales

Well



Baby Scale With Hold Function

Maximum capacity: 20kg
Divide: 5g; 23mm LCD display
CR2032 battery power supply (incl)
Equipped with high precision sensor
Start button, Function: Hold and Tare
Selectable unit of measure: kg/ lb/ oz
Auto-off function & auto zero
Low battery signaling



SCALE-BABY-03WE-WL

Well



Digital Personal Scale

4 high precision weight sensors
Maximum capacity: 150 Kg
Division: 100g, LCD displays
Automatic start by pressing on the upper surface
Function of autozero
Automatic stop function
Overload indication
Low battery level signaling



SCALE-PRS-BODYMASTER-WL

Well



Digital Personal Scale

4 high precision weight sensors
Maximum capacity: 150 Kg
Division: 100g, LCD displays
Automatic start by pressing on the upper surface
Function of autozero
Automatic stop function
Overload indication
Low battery level signaling



SCALE-PRS-CONTROL-WL



Bulbs/ Lamps

LED Bulbs - G4

Well



LED Bulb Cold Light

Color temperature: 6400K
Voltage: 200-240V
Power: 1.5W
Luminous flux: 90lm
Equivalent power: 10W
Energy Efficiency Class: A+



LEDLC-1.5G4-WL

LED Bulbs - G9

Well



LED Bulb Cold Light

Voltage: 220-240V
Power: 2.5W
Luminous flux: 200lm
Equivalent power: 20W
Energy Efficiency Class: A+



LEDLC-2.5G9-WL

LED Bulbs - E14

Well



LED Spot Cold Light

Current: 61mA
Luminous flux: 550lm
Power: 7W
Equivalent power: 45W
Socket: E14
Color temperature: 6500K



LEDLC-R507E14-WL

Well



LED Bulb Cold Light

Color temperature: 6400K
Voltage: 220-240V
Power: 2.5W
Socket: E14
Luminous flux: 180lm
Equivalent power: 20W
Energy Efficiency Class: A+



LEDLC-ST262.5E14-WL

Well



LED Bulb Cold Light

Voltage: 175-250V, Current: 61mA
Luminous flux: 580lm, Power: 7W
Equivalent power: 45W
Socket: E14, Model: G45
Light angle: 160 °
Power factor: > 0.5
CRI: > 80
Average lifetime: 25000h
Energy efficiency class: A+

Light color: 6500K
Cold light



LEDLC-G457E14-WL

Light color: 4000K
Natural light



LEDLN-G457E14-WL



Bulbs/ Lamps

Well



Candle LED Bulb Cold Light

Curent: 53mA
Luminous flux: 450lm
Power: 6W
Equivalent power: 38W
Socket: E14
Model: C37
Color temperature: 6400K



LEDLC-C376E14/FL-WL

Well



Candle LED Bulb Cold Light

Voltage: 220-240V
Power: 6W
Socket: E14
Luminous flux: 470lm
Equivalent power: 48W
Energy Efficiency Class: A+

Cold light



LEDLC-C376E14-WL

Natural light



LEDLN-C376E14-WL

Well



Candle LED Bulb Cold Light

Curent: 61mA
Luminous flux: 580lm
Power: 7W
Equivalent power: 45W
Socket: E14
Model: C37
Color temperature: 6500K



LEDLC-C377E14-WL

Well



LED Bulb Warm Light

Color temperature: 3000K
Voltage: 220-240V
Power: 6W
Socket: E14
Luminous flux: 470lm
Equivalent power: 40W
Energy Efficiency Class: A+



LEDLW-C376E14/BC-WL

Well



Flame LED Bulb Warm Light

Curent: 53mA
Luminous flux: 450lm
Power: 6W
Equivalent power: 38W
Socket: E14
Color temperature: 3000K



LEDLW-C376E14/FL-WL

Well



Candle LED Bulb Warm Light

Voltage: 175-250V
Socket: E14
Energy Efficiency Class: A+
Luminous flux: 450lm
Equivalent power: 38W



LEDLW-C376E14-WL

Luminous flux: 580lm
Equivalent power: 45W



LEDLW-C377E14-WL

Well



LED Spot Warm Light

Color temperature: 3000K
Voltage: 220-240V
Power: 3W
Socket: E14
Luminous flux: 200lm
Equivalent power: 25W
Energy Efficiency Class: A+



LEDLW-R393E14-WL

Well



LED Spot Warm Light

Color temperature: 3000K
Voltage: 175-250V
Power: 7W
Socket: E14
Luminous flux: 470lm
Equivalent power: 56W
Energy Efficiency Class: A+



LEDLW-R507E14-WL

Bulbs/ Lamps

LED Bulbs - E27

Well



LED Bulb Cold Light

Color temperature: 6400K
Voltage: 220-240V
Energy Efficiency Class: A+

Power: 10W
Luminous flux: 800lm
Equivalent power: 60W



LEDLC-A6010E27/BC-WL

Power: 12W
Luminous flux: 1050lm
Equivalent power: 75W



LEDLC-A6012E27/BC-WL

Well



LED Bulb Cold Light

Voltage: 220-240V
Energy Efficiency Class: A+

Power: 10W
Luminous flux: 806lm
Equivalent power: 80W



LEDLC-A6010E27-WL

Power: 12W
Luminous flux: 1055lm
Equivalent power: 96W



LEDLC-A6012E27-WL

Well



LED Bulbs Cold Light Set

Set: 3xPcs, Voltage: 175-250V, Current: 100mA,
Luminous flux: 1055lm, Power: 12W, Corresponding to
75W, Socket: E27, Type: A60, Beam angle: 240°, Power
factor: >0.5, CRI: >80, Color temp: 6400K



LEDLC-A6012E27-BX3-WL

Well



LED Bulb Cold Light

Voltage: 220-240V
Power: 12W
Socket: E27
Luminous flux: 638lm
Equivalent power: 64W
Energy Efficiency Class: A+



LEDLC-A608E27-WL

Well



LED Bulb Cold Light

Voltage: 175-250V
Current: 130mA
Luminous flux: 1450lm
Power: 15W
Equivalent power: 120W
Light angle: 240°
Color temperature: 6400K



LEDLC-A6515E27/BC-WL

Well



LED Bulb Cold Light

Color temperature: 6500K
Voltage: 220-240V
Power: 15W
Socket: E27
Luminous flux: 1320lm
Equivalent power: 120W
Energy Efficiency Class: A+



LEDLC-A6515E27-WL

Well



LED Bulb Cold Light

Current: 183mA
Luminous flux: 1700lm
Power: 21W
Equivalent power: 110W
Socket: E27
Model: A95
Color temperature: 6400K



LEDLC-A9521E27-WL

Well



Candle LED Bulb Cold Light

Voltage: 175-250V
Current: 61mA
Luminous flux: 580lm
Power: 7W
Equivalent power: 45W
Socket: E27
Light angle: 160°
Color temperature: 6500K



LEDLC-C377E27-WL

Bulbs/ Lamps

Well



LED Bulb

Voltage: 220-240V
Power: 6W
Socket: E27
Luminous flux: 470lm
Equivalent power: 48W
Energy Efficiency Class: A+



LEDLC-G456E27-WL

Well



LED Bulb Cold Light

Curent: 61mA
Luminous flux: 580lm
Power: 7W
Equivalent power: 45W
Socket: E27
Light angle: 160°
Color temperature: 6500K
Dimensiuni (mm): 45x80



LEDLC-G457E27-WL

Well



LED Bulb Natural Light

Curent: 131mA
Luminous flux: 1200lm
Power: 15W
Equivalent power: 85W
Socket: E27
Model: A60
Color temperature: 4000K



LEDLN-A6515E27/BC-WL

Well



LED Bulb Natural Light

Luminous flux: 1200lm
Power: 15W
Socket: E27
Model: A65



LEDLN-A6515E27-WL

Well



LED Bulb Natural Light

Curent: 183mA
Luminous flux: 1700lm
Power: 21W
Equivalent power: 110W
Socket: E27
Model: A95
Color temperature: 4000K



LEDLN-A9521E27-WL

Well



LED Bulb with Light Sensor Natural light

Luminous flux: 806lm
Power: 10W
Equivalent power: 60W
Socket: E27
Model: A60
Light angle: 100°
Color temperature: 4000K



LEDLNLS-A6010E27-WL

Well



LED Bulb with PIR Sensor Natural light

Voltage: 220-240V
Socket: E27
Model: A60
Light angle: 200°
Detection distance: 3M
Detection angle: 90°

Luminous flux: 810lm
Power: 10W
Equivalent power: 60W



LEDLNPIR-A6010E27-WL

Luminous flux: 1055lm
Power: 12W
Equivalent power: 75W



LEDLNPIR-A6012E27-WL

Well



LED Bulb Cold Light

Color temperature: 6500K
Voltage: 85-265V
Power: 13W
Socket: E27
Luminous flux: 1140lm
Equivalent power: 80W
Energy Efficiency Class: A+



LEDLC-PLC13E27-WL

Well



LED Bulb Warm Light

Vol+434:441tage:220-240V
Luminous flux:750lm
Equivalent power:55W
Color temperature:3000K
Energy Efficiency Class: A+

Power:10W



LEDLW-A6010E27/BC-WL

Power: 12 W



LEDLW-A6012E27/BC-WL

Bulbs/ Lamps



Well

LED Bulb Warm Light

Voltage: 175-250V
Socket: E27
Luminous flux: 800lm
Equivalent power: 60W
Energy Efficiency Class: A+

Power: 10W



LEDLW-A6010E27-WL

Power: 12 W



LEDLW-A6012E27-WL



Well

LED Bulb Warm Light

Voltage: 175-250V
Socket: E27
Luminous flux: 640lm
Equivalent power: 50W
Energy Efficiency Class: A+



LEDLW-A608E27-WL



Well

LED Bulb Warm Light

Color temperature: 3000K
Voltage: 220-240V
Current: 131mA
Luminous flux: 1200lm
Power: 15W
Light angle: 240°
Energy Efficiency Class: A+



LEDLW-A6515E27/BC-WL



Well

LED Bulb Warm Light

Color temperature: 3000K
Voltage: 220-240V
Socket: E27
Luminous flux: 1200lm
Equivalent power: 85W
Energy Efficiency Class: A+



LEDLW-A6515E27-WL



Well

LED Bulb Warm Light

Voltage: 175-250V
Luminous flux: 1500lm
Power: 18W
Socket: E27
Model: A65
Color temperature: 3000K



LEDLW-A6518E27-WL



Well

Candle LED Bulb Warm Light

Current: 61mA
Luminous flux: 580lm
Power: 7W
Equivalent power: 45W
Light angle: 160°
Color temperature: 3000K
Dimensions (mm): 37x100



LEDLW-C377E27-WL



Well

LED Bulb Warm Light

Power: 4W
Socket: E27
Energy Efficiency Class: A+

Voltage: 220-240V
Luminous flux: 323lm
Equivalent power: 32W



LEDLW-G454E27-WL

Voltage: 175-250V
Luminous flux: 470lm
Equivalent power: 38W



LEDLW-G456E27-WL

Current: 61mA
Luminous flux: 580lm
Equivalent power: 45W



LEDLW-G457E27-WL



Well

LED Spot Warm Light

Voltage: 220-240V
Power: 12W
Socket: E27
Luminous flux: 600lm
Equivalent power: 55W
Energy Efficiency Class: A+



LEDLW-R6308E27-WL

Bulbs/ Lamps

Well



Anti-Mosquito LED Bulb with UV Light

Luminous flux: 560lm
Power: 8W
Equivalent power: 56W
Emitted wavelength: 385-395Nm
Grid voltage: 600V
Coverage area: 10M2



LEDMQC-8WE27-WL

Well



Vintage Filament Bulb, Edison Type

Color temperature: 2200K
Voltage: 230V
Socket: E27
Luminous flux: 240lm
Power: 60W



EFLWST6460E27-WL

LED Bulbs - GU10

Well



LED Spot Cold Light

Color temperature: 6400K
Voltage: 220-240V
Power: 5W
Socket: GU10
Luminous flux: 410lm
Equivalent power: 40W
Energy Efficiency Class: A+



LEDL-CMR165GU10-WL

LED Bulbs With Sensor

Well



LED Bulb With PIR Sensor, Cold Light

Socket: E27
Model: A60
Light angle: 200°
Distanța de detecție: 3M
Detection angle: 90°
Color temperature: 6500K

.....
Luminous flux: 810lm
Power: 10W
Equivalent power: 60W



LEDLCP-IR-A6010E27-WL

.....
Luminous flux: 1055lm
Power: 12W
Equivalent power: 75W



LEDLCP-IR-A6012E27-WL

Bulbs/ Lamps

LED Bulbs Emergency

Well



Emergency LED Bulb 7W

Voltage: 85-265V
Power: 7W
Socket: E27
Luminous flux: 350lm
Equivalent power: 56W
Energy Efficiency Class: A

Cold light



LEDLEC-A607E27-WL

Natural light



LEDLEN-A607E27-WL

Well



Emergency LED Bulb 12W

Voltage: 85-265V
Power: 12W
Socket: E27
Luminous flux: 600lm
Equivalent power: 75W
Energy Efficiency Class: A

Cold light



LEDLEC-A6812E27-WL

Natural light



LEDLEN-A6812E27-WL



Well



LED Bulb Natural Light

Voltage: 175-250V
Luminous flux: 800lm
Equivalent power: 60W
Socket: E27
Light angle: 240°
Color temperature: 4000K



LEDLN-A6010E27-WL

RGB LED Bulbs

Well



RGB LED Bulb with RC

Color temperature: 4000K
Voltage: 220-240V
Socket: E27
Energy Efficiency Class: A+
RGB function, with the help of the remote control included in the package

Power: 6W
Luminous flux: 470lm
Equivalent power: 40W



LEDLRGBN-A808E27-WL

Power: 9W
Luminous flux: 810lm
Equivalent power: 60W



LEDLRGBN-A808E27-WL

Well



RGB LED Bulb with RC

Voltage: 220-240V
Power: 5.5W
Socket: E14
Luminous flux: 470lm
Equivalent power: 40W
Energy Efficiency Class: A+
RGB function, with the help of the remote control included in the package



LEDLRGBN-C375.6E14-WL

Well



RGB LED Bulb with RC

Color temperature: 3000K
Voltage: 12V
Socket: G4
Luminous flux: 90lm
Equivalent power: 10W
Energy Efficiency Class: A+



LEDLW-1.5G4-WL

Well



RGB LED Bulb with RC

Color temperature: 3000K
Voltage: 220-240V
Socket: G9
Luminous flux: 200lm
Equivalent power: 20W
Energy Efficiency Class: A+



LEDLW-2.5G9-WL

Well



RGB Disco LED Bulb with RC

Voltage: 220-240V
Power: 3W
Socket: E27
Energy Efficiency Class: A+
RGB function, with the help of the remote control included in the package



LEDLRGBN-DISCO3E27-WL

Well



RGB LED Bulb with RC

Voltage: 220-240V
Power: 5.5W
Socket: E14
Luminous flux: 470lm
Equivalent power: 40W
Energy Efficiency Class: A+
RGB function, with the help of the remote control included in the package



LEDLRGBN-G455.6E14-WL

Interior Lighting

Sockets

Well



E27 Power Socket

Socket: E27
With switch
Color: White
Voltage: 230V, 50-60Hz



SOCKET-E27-PL-WL

Moonball Light

Well



RGB Moonball Light

Charging Input: 5V DC, 1A
Charging cable: USB 2.0/
3.0
Battery: 300mA, Li-Ion
Diameter: 14.8mm; 7 colors
Material: Environmental PVC & ABS; IP20
Contain: Moon ball, USB charging cable, Wooden
support



DECOL-MNL/MC7-WL



Interior Lighting

Office Lamps



Well

LED Table Lamp

With pen holder
Touch switch
Adjust brightness
Power: 3W
Luminous flux: 220lm
Ambiental RGB light
Color temperature: 4000K
Battery capacity: 1200mAh



LAMP-TABLE-LP02-WL



Well

LED Table Lamp

LCD screen: time, alarm clock, temperature, calendar
Power: 4W
Luminous flux: 250lm
Ambiental RGB light
Input: DC 5V 0.5A
Color temperature: 4000K
Battery capacity: 1200mAh



LAMP-TABLE-LRC01-WL



Well

LED Table Lamp

Wi-Fi Charger: 5W
Power: 5W
Luminous flux: 200lm
Ambiental RGB light
Input: DC 5V 2A
Color temperature: 4000K
CRI: ≥80



LAMP-TABLE-LW03-WL



Interior Lighting

Safety Lighting

Well



Emergency Exit Sign

Voltage: 110-230V
Power: 2W
7 SMD LED's
Built-in battery: 3.6V 300mAh
Charging time: 8-12h
Electrical insulation class: II
Wall or ceiling mounting



LEDESC-2W-IP20-WL

Well



Emergency Exit Light

Voltage: 100-240V
Power: 3W
6 SMD LED's
Built-in battery: 3.6V 1800mAh
Electrical insulation class: II
Wall or ceiling mounting
Includes EXIT sticker



LEDBHEC-3W/6L-IP20-WL

Well



Emergency Exit Light

Voltage: 100-240V
Power: 3W
30 SMD LED's
Built-in battery: 3.6V 1000mAh
Electrical insulation class: II
Wall or ceiling mounting
Includes EXIT sticker



LEDBHEC-3W/30L-IP65-WL



Interior Lighting

LED fixtures

Well



LED Batten Lamp

Voltage: 220-240V
Luminous flux: 1660lm
Color temperature: 6000K
Energy Efficiency Class: A+
Power: 20W

.....
Cold light



LEDBC-2060-WL

.....
Natural light



LEDBN-2060-WL

Well



LED Batten Lamp

Voltage: 220-240V
Luminous flux: 2490lm
Color temperature: 6000K
Energy Efficiency Class: A+
Power: 30W
Power factor: >0.9

.....
Cold light



LEDBC-3090-WL

.....
Natural light



LEDBN-3090-WL

Well



LED Batten Lamp

Voltage: 220-240V
Luminous flux: 3320lm
Color temperature: 6000K
Energy Efficiency Class: A+
Power: 40W
Power factor: >0.9

.....
Cold light



LEDBC-40120-WL

.....
Natural light



LEDBN-40120-WL

Well



LED Light Fixture with Sensor

4 x White LED
Color temperature: 4000K
Detection range: 3M
Battery: 3x AAA (not incl)
Autonomy: Automatic detection - 150 days
Continuous illumination - 13h



LEDSLN-CHIC-WL

Well



LED Light Fixture with Sensor

6 x White LED
Color temperature: 4000K
Detection range: 3M
Battery: 3x AAA (not incl)
Autonomy: Automatic detection - 120 days
Continuous illumination - 10h



LEDSLN-STYLE-WL

Interior Lighting

T5 LED Tubes

Well



T5 LED Tube Cold light

Voltage: 220-240V
Luminous flux: 320lm
Color temperature: 6000K
Energy Efficiency Class: A+
Power factor: >0.5
Light angle: 130°

Power: 4W



LEDTC-4T5-COMFORT-WL

Power: 7W



LEDTC-7T5-COMFORT-WL

Power: 10W



LEDTC-10T5-COMFORT-WL

Well



T5 LED Tube Natural light

Voltage: 220-240V
Luminous flux: 320lm
Power factor: >0.5
CRI: 80
Color temperature: 4000K
Light angle: 130°

Power: 4W



LEDTN-4T5-COMFORT-WL

Power: 7W



LEDTN-7T5-COMFORT-WL

Power: 10W



LEDTN-10T5-COMFORT-WL

LED Spots

Well



LED Spot Warm Light

Color temperature: 3000K
Voltage: 220-240V
Socket: GU10
Model: MR16
Light angle: 110°
Energy Efficiency Class: A+

Power: 5W

Luminous flux: 400lm
Equivalent power: 35W



LEDLW-MR165GU10-WL

Power: 6W

Luminous flux: 410lm
Equivalent power: 48W



LEDLW-MR166GU10-WL

Power: 8W

Luminous flux: 702lm
Equivalent power: 64W



LEDLW-MR168GU10-WL

Well



LED Spot

Voltage: 100-240V
Luminous flux: 240lm
Power: 3W
Power factor: >0.4
CRI: 80
Color temperature: 6500K
Diameter: 55-60mm
Rotary model

Cold light



LEDDRC-63-GLAMOR-WL

Natural light



LEDDRN-63-GLAMOR-WL

Well



LED Spot

Voltage: 100-240V
Luminous flux: 350lm
Power: 5W
Power factor: >0.4
CRI: 80
Color temperature: 6500K
Diameter: 70-75mm
Rotary model

Cold light



LEDDRC-75-GLAMOR-WL

Natural light



LEDDRN-75-GLAMOR-WL

Exterior Lighting

Floodlights

Well



LED Floodlight

Luminous flux: 800lm
Power: 10W
Power factor: >0.9
CRI: 70
Color temperature: 6500K
Protection class: IP65
Housing: Cast Aluminum



LEDFC-SPARKLE10BK-WL

Well



LED Floodlight

Luminous flux: 800lm
Power: 10W
Color temperature: 4000K
Protection class: IP65
Energy Efficiency Class: A+
Housing: Cast Aluminum

Color: Black



LEDFN-SPARKLE10BK-WL

Color: White



LEDFN-SPARKLE10WE-WL

Well



LED Floodlight

Voltage: 220-240V
Luminous flux: 1600lm
Power: 20W
Power factor: >0.9
CRI: 70
Color temperature: 6500K
Protection class: IP65
Housing: Cast Aluminum



LEDFC-SPARKLE20BK-WL

Well



LED Floodlight with Sensor

Luminous flux: 1600lm
Power: 20W
Power factor: >0.9
Detection angle: 120°
Color temperature: 4000K
Protection class: IP44



LEDFN-SPARKLE20BKPIR-WL

Well



LED Floodlight

Luminous flux: 1600lm
Power: 20W
Power factor: >0.9
CRI: 70
Color temperature: 4000K
Protection class: IP65
Housing: Cast Aluminum

Color: Black



LEDFN-SPARKLE20BK-WL

Color: White



LEDFN-SPARKLE20WE-WL

Well



LED Floodlight

Voltage: 220-240V
Luminous flux: 2400lm
Power: 30W
Power factor: >0.9
CRI: 70
Color temperature: 6500K
Housing: Cast Aluminum



LEDFC-SPARKLE30BK-WL

Well



LED Floodlight with Sensor

Luminous flux: 2400lm
Power: 30W
Power factor: >0.9
Detection angle: 120°
Color temperature: 4000K
Protection class: IP44



LEDFN-SPARKLE30BKPIR-WL

Well



LED Floodlight

Luminous flux: 2400lm
Power: 30W
Power factor: >0.9
CRI: 70
Color temperature: 4000K
Protection class: IP65
Housing: Cast Aluminum



LEDFN-SPARKLE30BK-WL

Well



LED Floodlight

Luminous flux: 4000lm
Power: 50W
Power factor: >0.9
CRI: 70
Color temperature: 4000K
Protection class: IP65
Housing: Cast Aluminum



LEDFN-SPARKLE50BK-WL

Exterior Lighting

Well



LED Floodlight

Luminous flux: 8000lm
Power: 100W
Power factor: >0.9
CRI: 70
Color temperature: 4000K
Protection class: IP65
Housing: Cast Aluminum



LEDFN-SPARKLE100BK-WL

Well



RGB LED Floodlight

Voltage: 220-240V
Luminous flux: 470lm
Power: 7W
Color temperature: 4000K
Protection class: IP65



LEDFRGB-FANCY7-WL

LED Worklights

Well



Portable LED Worklight

Luminous flux: 600lm
Power: 10W
CRI: ≥75
Color temperature: 4000K
Protection class: IP44
Housing: ABS
Adjustable handle



LEDFPN-COMPACT10-WL

Well



Rechargeable Portable LED Worklight

Luminous flux: 700lm
Power: 10W
CRI: ≥75
Color temperature: 4000K
Input & Output: 5V
Adjustable handle
Charging Cable: USB 1M



LEDFPN-MOBILE10-WL

Well



Rechargeable Portable LED Worklight

Luminous flux: 1400lm
Power: 20W
CRI: ≥75
Color temperature: 4000K
Input & Output: 5V
Adjustable handle
Charging Cable: USB 1M



LEDFPN-MOBILE20-WL

Decorative Lights LED

Well



Decorative RGB LED Floodlight

Input voltage: 220 -240V AC
Output: 12V 200mA 3.6W
Material: ABS, IP44
Working temperature: -25℃ +40℃ With moving light effects, fulgi de nea



PROJ-LED-RGBW4-WL

Well



Indoor Laser Light Projector

Input Voltage: 220 -240V AC, 50-60Hz
Output: 5V 1A 5W AC Adapter
Laser source: Red-100mw@650nm/ Green-20mw@532nm
Material: Al; IP20, Working temp: 5-35℃



PROJ-LSR-RG6ID-WL

Well



Outdoor Laser Projector

Outdoor Laser Projector
Input voltage: 220 -240V AC
Output: 5V 1A 5W AC Adaptor
With moving light effects, 8 images & RC



PROJ-LSR-RG8-WL

Exterior Lighting

Wall Lights

Well



Round Outdoor Bulkhead Light

Voltage: 220-240V
Luminous flux: 900lm
Power: 12W
Color temperature: 6000K
Light angle: 120°

Cold light



LEDBHRC-1612-WL

Natural light



LEDBHRN-1612-WL

Well



Round Outdoor Bulkhead Light

Voltage: 220-240V
Luminous flux: 1350lm
Power: 18W
Color temperature: 6000K
Light angle: 120°

Cold light



LEDBHRC-1718-WL

Natural light



LEDBHRN-1718-WL

Well



LED Ceiling Light with Sensor

Luminous flux: 1200lm
Power: 15W
Color temperature: 4000K
Light angle: 120°
Detection angle: 360°
Detection distance: 6M (<24°)



LEDCNPIR-1530-STEP-WL

Well



Oval Outdoor Bulkhead Light

Voltage: 220-240V
Luminous flux: 900lm
Power: 12W
Color temperature: 6000K
Light angle: 120°

Cold light



LEDBHOC-1812-WL

Natural light



LEDBHON-1812-WL

Well



Oval Outdoor Bulkhead Light

Voltage: 220-240V
Luminous flux: 1350lm
Power: 18W
Color temperature: 6000K
Light angle: 120°

Cold light



LEDBHOC-2018-WL

Natural light



LEDBHON-2018-WL

Ceiling Lights

Well



LED Ceiling Light

Voltage: 220-240V
Luminous flux: 960lm
Color temperature: 6000K
Energy Efficiency Class: A+
Power: 12W
Power factor: >0.5

Cold light



LEDCC-1226-SATIN-WL

Natural light



LEDCN-1226-SATIN-WL

Well



LED Ceiling Light

Voltage: 220-240V
Luminous flux: 1440lm
Color temperature: 6000K
Energy Efficiency Class: A+
Power: 18W
Power factor: >0.5

Cold light



LEDCC-1833-SATIN-WL

Natural light



LEDCN-1833-SATIN-WL

Sensors

Motion sensors

Well



Infrared Motion Sensor

Sensor detection angle: 360°
Detection distance: 8M (<24°)
Ignition time setting: 10sec - 7min
Power supply: 220-240V 50Hz
Protection class: IP20



SENS-PIR-C02-WL

Well



Infrared Motion Sensor

Sensor detection angle: 360°
Detection distance: 6M (<24°)
Power supply: 220-240V 50Hz
Power supported: Max. 1200W
Protection class: IP20



SENS-PIR-C03-WL

Well



Infrared Motion Sensor

Sensor detection angle: 120°/360°
Detection distance: 6M (<24°)
Ignition time setting: 5sec, 30sec, 1Min, 3Min, 5min, 8min
Protection class: IP20/IP65



SENS-PIR-D04-WL

Well



Infrared Motion Sensor

Sensor detection angle: 360°
Detection distance: 6M (<24°)
Ignition time setting: 10sec - 5min
Power supported: Max. 60W
Protection class: IP20



SENS-PIR-E27H-WL

Well



Infrared Motion Sensor

Sensor detection angle: 180°
Detection distance: 12m (<24°)
Ignition time setting: 10sec - 7min
Power supported: Max. 1200W
Protection class: IP44



SENS-PIR-W01-WL



Telephones

Well



Wired Caller ID Telephone

16-digit LCD display with calendar
28 incoming calls and 5 outgoing calls
1 one-touch memory
VIP number, Special ringing tone for VIP calls
5-digit area code function
5 levels LCD contrast adjustable
8 kinds of ringing tone for selection
2 levels hands-free volume control
Redial and auto-redial function
Wall mounting option

Color: Black



PHONE-CORD-CD001BK-WL

Color: White



PHONE-CORD-CD001WE-WL



Clock / Radio

Radio's

Well



LED Projection Clock Radio

LED display size: 0.9"
LED color: Red
20 FM preset stations
PLL radio, Dual alarm
Functions: Dimmer, Snooze, Sleep, Nap
Voltage: 230V, 50Hz
Battery backup: 2x AAA (not incl)



CLOCK-DESK-AWAKE-WL

Well



LED Clock Radio

LED display size: 0.6"
LED color: Red
10 FM preset stations
PLL radio, Dual alarm
Functions: Snooze, Sleep, Dimmer
Voltage: 230V, 50Hz
Battery backup: 2x AAA (not incl)



CLOCK-DESK-RELAX-WL

Well



LED Clock Radio With Lighting

LED display size: 0.6"
LED color: Red
Adjustable LED brightness
20 FM preset stations
PLL radio, Dual alarm
Functions: Snooze, Sleep, Nap
Voltage: 230V, 50Hz
Battery backup: 2x AAA (not incl)



CLOCK-DESK-TWILIGHT-WL



TV & Satellite

Remote controls



Universal RC

Controls all functions: Menu, AV, Teletext, Color
Ready to use, no additional settings, very easy to use.
Replaces all Samsung remote controls
Operating distance: 8M
Batteries: AAA (R3) (not included)
High quality ABS material



RC-UNIV-SAMSUNG-WL

Well



Universal RC

Controls all functions: Menu, AV, Teletext, Color
Ready to use, no additional settings, very easy to use.
Replaces all Sony remote controls
Operating distance: 8M
Batteries: AAA (R3) (not included)
High quality ABS material



RC-UNIV-SONY-WL



TV & Satellite

Well



Original Design Remote Control

Original Design Remote Control Taurus
Model: N18



RCO N18

Well



Original Design Remote Control

Original Design Remote Control Philips
Model: RC8205



RCO RC8205

Well



Original Design Remote Control

Original Design Remote Control Vestel
Model: V1940



RCO V1940

Well



Universal RC

Ideal for replacing damaged or lost original remote controls.
Compatible with LCD / Plasma TV
2x AA/ R6 batteries (not incl)
Range: up to 10M
Color: Gray



RC-UNIV-13SR-WL

Programmable RC's

Well



Universal Programmable RC Via IR

Can be programmed countless times for a max of 4 devices. Very large database (over 100,000 devices) with permanent update. The database refers to: TV, SAT, DVD, HI-FI, VCR, COMBI etc. It works with the RC-PROG-KIT-WL sensor. It also has a cloning function.



RC-PROG-TRICKY-WL

Well



Universal Programmable RC Via IR

Can be programmed countless times for a max of 4 devices. Very large database (over 100,000 devices) with permanent update. The database refers to: TV, SAT, DVD, HI-FI, VCR, COMBI etc. It works with the RC-PROG-KIT-WL sensor. It also has a cloning function.



RC-PROG-WILY-WL

Dedicated RC's

Well



Universal RC

Controls all functions: Menu, AV, Teletext, Color
Ready to use, no additional settings, very easy to use.
Replaces all LG remote controls
Operating distance: 8M
Batteries: AAA (R3) (not included)
High quality ABS material



RC-UNIV-LG-WL

Well



Universal RC

Controls all functions: Menu, AV, Teletext, Color
Ready to use, no additional settings, very easy to use.
Replaces all Panasonic remote controls
Operating distance: 8M
Batteries: AAA (R3) (not included)
High quality ABS material



RC-UNIV-PANASONIC-WL

Well



Universal RC

Controls all functions: Menu, AV, Teletext, Color
Ready to use, no additional settings, very easy to use.
Replaces all Philips remote controls
Operating distance: 8M
Batteries: AAA (R3) (not included)
High quality ABS material



RC-UNIV-PHILIPS-WL

TV & Satellite

TV Remote Controls

Well



Original Design Remote Control

Original Design Remote Control Eurocolor
Model: 1045



RCO 1045

Well



Original Design Remote Control

Original Design Remote Control Beko
Model: 16.9SMT



RCO 16.9SMT

Well



Original Design Remote Control

Original Design Remote Control Vestel
Model: RC2040



RCO 2040

Well



Original Design Remote Control

Original Design Remote Control Vestel
Model: RC3040



RCO 3040

Well



Original Design Remote Control

Original Design Remote Control LG
Model: 6710V00007A



RCO 6710V00007A

Well



Original Design Remote Control

Original Design Remote Control Philips
Model: 909



RCO 909

Well



Original Design Remote Control

Original Design Remote Control Samsung LCD
Model: AH59-02303A



RCO AH59-02303A

Well



Original Design Remote Control

Original Design Remote Control Digi
Model: DIGITV



RCO DIGITV

Well



Original Design Remote Control

Original Design Remote Control Dolce
Model: DOLCE



RCO DOLCE

Well



Original Design Remote Control

Original Design Remote Control Dolce
Model: DOLCE SAT



RCO DOLCE SAT

Well



Original Design Remote Control

Original Design Remote Control Focus Sat
Model: Focus Sat



RCO FOCUS SAT

Well



Original Design Remote Control

Original Design Remote Control Humax
Model: Humax



RCO HUMAX

TV & Satellite

Splitters

Well



Satellite F-Splitter

Zinc die-cast housing with satellite DC-power pass and with F-connectors to split a satellite-signal.

Colour: Silver

Frequency range: 5 - 2400 MHz

Impedance: 75 Ohm

Insertion loss: 6.5 dB

Number of outputs: 2



SPLT-FC/2-ST-WL

Number of outputs: 3



SPLT-FC/3-ST-WL

Number of outputs: 4



SPLT-FC/4-ST-WL

Number of outputs: 6



SPLT-FC/6-ST-WL



Well

CATV F-Splitter

Zinc die-cast housing with F-connectors to split a TV-signal

Type: TV F Splitter

Colour: Silver

Frequency range: 5 - 1000 MHz

Impedance: 75 Ohm

Insertion loss: 4.2 dB

Number of outputs: 2



SPLT-FC/2-WL

Number of outputs: 3



SPLT-FC/3-WL

Number of outputs: 4



SPLT-FC/4-WL

Number of outputs: 6



SPLT-FC/6-WL

Terrestrial Receivers

Well



HD DVB-T2 Receiver

Fully comply with DVB-T2 and H.264, MPEG-4, MPEG2 standards

Support PVR function and video playback (MPEG1, MPEG2, MPEG4, H264, motion JPEG: AM, DAT, VOB, DIV, MOV, MKV etc) via USB2.0

Support audio files: WMA, MP3, AAC, photo files: JPEG, BMP, PNG

Video output resolution:

576i/576p/720p/1080i/1080p 50Hz

Fully support to 7 days Electronic program Guide (EPG)


Capacity for storing up to 1000 channels of TV and radio programs

Various channel editing function (favorite, move, lock, skip, delete)

Software upgrade via USB



REC-DVBT2-AMUSE-WL

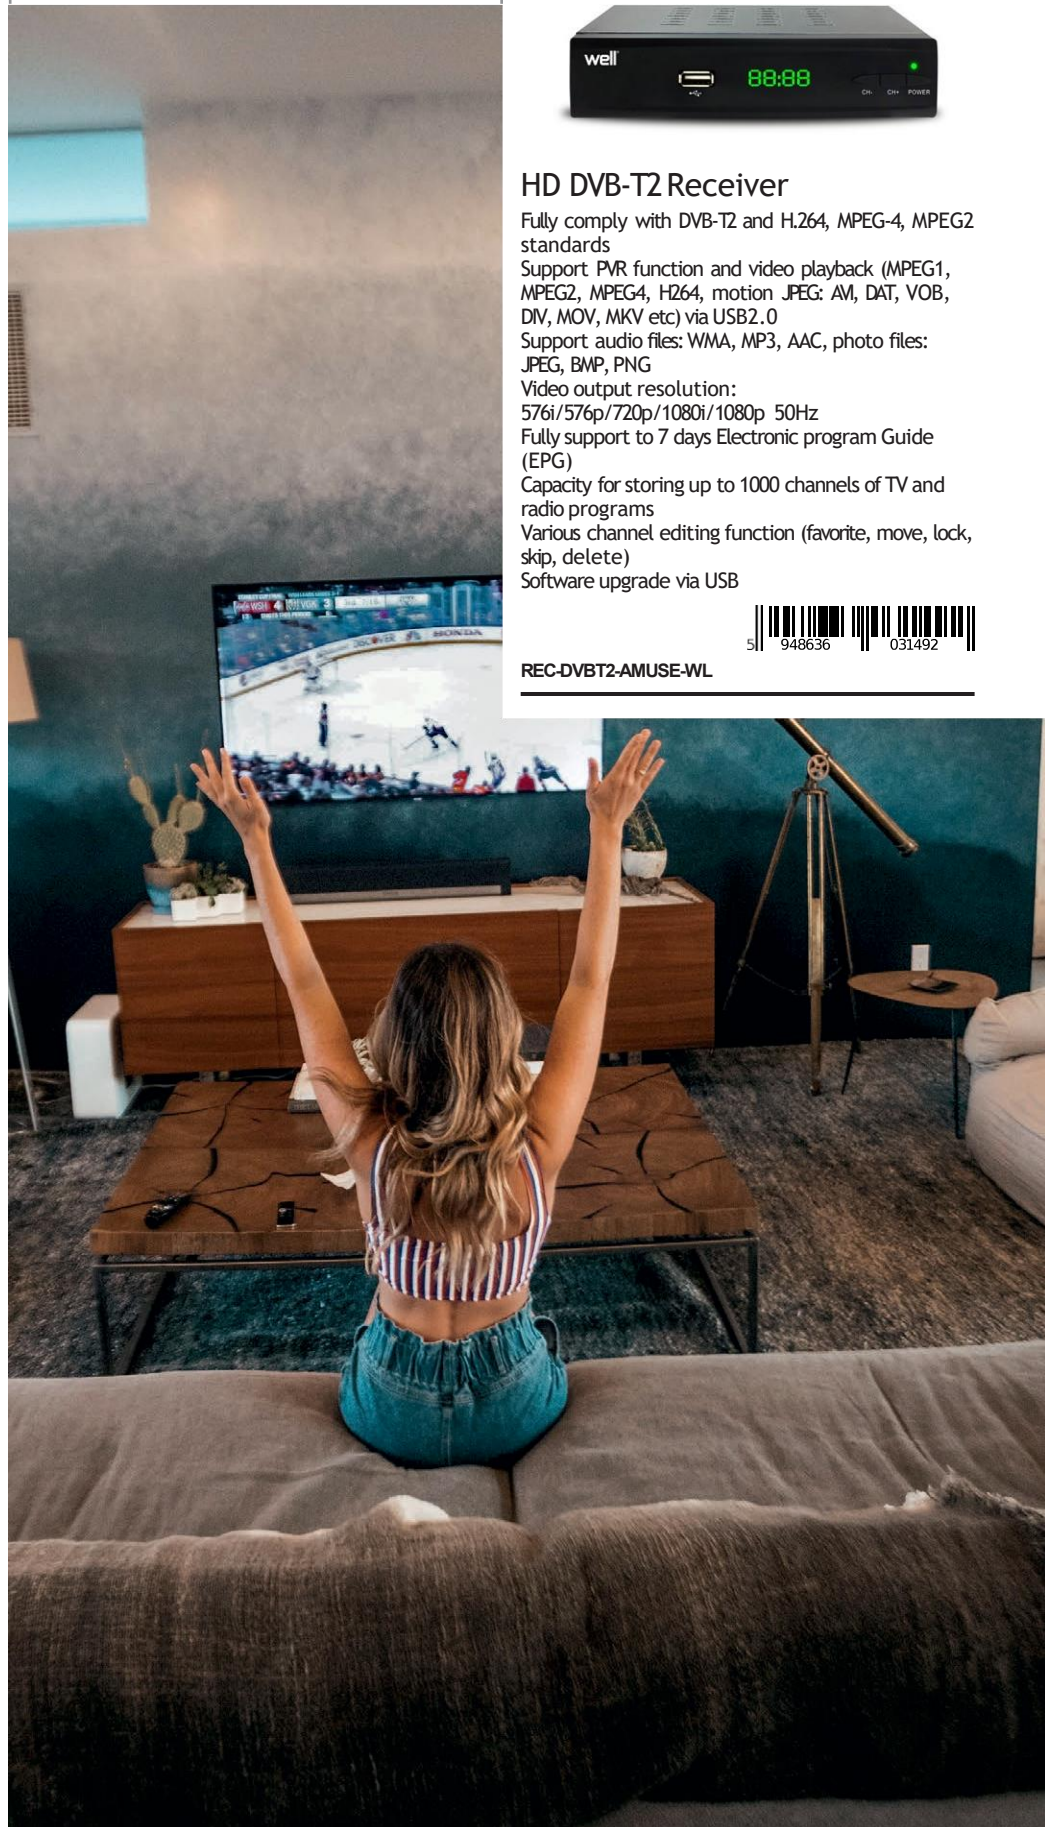

TV & Satellite

TV Wall Mount's

Well



Fixed TV Wall Mount

Material: Steel
Material thickness: 1.5mm
Screen size: 13"-43" (33cm-109cm)
VESA compatible (mm): from 75x75 to 200x200
Distance to the wall: 20mm
Max weight supported: 27kg
Secure locking system
Color: Black



TVS-LCD-FX43-WL

Well



Fixed TV Wall Mount With Cord

Material: steel
Material thickness: 1.5mm
Screen size: 13"-43" (33cm-109cm)
VESA compatible (mm): from 75x75 to 200x200
Distance to the wall: 28mm
Max weight supported: 25kg
Integrated bubble level
Mounting with cord
Color: Black



TVS-LCD-FXS43-WL

Well



Fixed TV Wall Mount Package With Cord

Material: Steel
Material thickness: 1.5mm
Screen size: 23"-60" (58cm-152cm)
VESA compatible (mm): from 100x100 to 400x400
Distance to the wall: 28mm
Max weight supported: 45kg
Integrated bubble level
Mounting with cord, Color: black
Included: 2M HDMI cable & cleaning solution



TVS-LCD-FXS60P-WL

Well



Fixed TV Wall Mount With Cord

Material: Steel
Material thickness: 1.5mm
Screen size: 32"-80" (81cm-203cm)
VESA Standard: 100x100 to 600x400
Profile: 23mm
Weight Capacity: 45kg
Integrated bubble level
Mounting with cord, Color: Black



TVS-LCD-FXS80-WL

Well



Swivel TV Wall Mount

Material: Steel
Material thickness: 1.8mm
Screen size: 14"-43" (36cm-109cm)
VESA compatible (mm): from 100x100 to 200x200
Distance to the wall: 52mm-258mm
Tilt from -3° to + 10°
Max weight supported: 20kg
Special design for cable management
Color: Black



TVS-LCD-SW143-WL

Well



Swivel TV Wall Mount

Material: Steel
Material thickness: 1.8mm
Screen size: 23"-55" (58cm-140cm)
VESA compatible (mm): from 100x100 to 200x200
Distance to the wall: 58mm-262mm
Tilt: from -3° to + 10°
Max weight supported: 20kg
Special design for cable management
Color: Black



TVS-LCD-SW155-WL

Well



Swivel TV Wall Mount

Material: Steel
Material thickness: 1.8mm
Screen size: 14",-43" (36cm-109cm)
VESA compatible (mm): from 100x100 to 200x200
Distance to the wall: 55mm-415mm
Tilt: from -3° to + 10°
Max weight Supported: 35kg
Special design for cable management
Color: Black, Arms: 3



TVS-LCD-SW343-WL

Well



Swivel TV Wall Mount Package

Material: Steel
Material thickness: 1.8mm
Screen size: 23",-55" (58cm-140cm)
VESA compatible (mm): from 100x100 to 400x400
Distance to the wall: 62mm-422mm
Tilt: from -3° to + 10°
Max weight Supported: 35kg, Arms: 3
Special design for cable management
Color: Black, Included: 2M HDMI cable & cleaning solution



TVS-LCD-SW355P-WL

Well



Swivel TV Wall Mount

Material: Steel
Material thickness: 1.8mm
Screen size: 32"-70" (81cm-178cm)
VESA Standard: 100x100 to 600x400
Distance to the wall: 64mm-500mm
Tilt: from -3° to +12°
Weight Capacity: 50kg
Special design for cable management
Color: Black, Arms: 6



TVS-LCD-SW670-WL

TV & Satellite

Well



Tiltable TV Wall Mount

Material: Steel
Material thickness: 1.5mm
Screen size: 13 „-43” (33cm-109cm)
VESA compatible (mm): from 75x75 to 200x200
Distance to the wall: 22mm
Tilt: from 0° to + 6°
Max weight supported: 27kg
Secure locking system, Color: Black



TVS-LCD-TL43-WL

Well



Tiltable TV Wall Mount With Cord

Material: Steel
Material thickness: 1.5mm
Screen size: 32”-80” (81cm-203cm)
VESA Standard: 100x100 to 600x400
Profile: 37mm
Tilt: -3° to +10°
Weight Capacity: 45kg
Integrated bubble level
Mounting with cord, Color: Black



TVS-LCD-TLS80-WL

Well



Tiltable TV Wall Mount With Cord

Material: steel
Material thickness: 1.5mm
Screen size: 13 „-43” (33cm-109cm)
VESA compatible (mm): from 75x75 to 200x200
Distance to the wall: 42mm
Tilt: from -3 °to + 10 °
Max weight supported: 25kg
Integrated bubble level
Mounting with cord, Color: Black



TVS-LCD-TLS43-WL

Well



Tiltable TV Wall Mount With Cord

Material: Steel
Material thickness: 1.5mm
Screen size: 23 „-60” (58cm-152cm)
VESA compatible (mm): from 100x100 to 400x400
Distance to the wall: 42mm
Inclination: from -3° to + 10°
Max weight supported: 45kg
Integrated bubble level
Mounting with cord, Color: Black



TVS-LCD-TLS60-WL



CCA Speaker Cables

Well



Speaker Cable

Conductor: 2X0.35mm²
Conductor material: AL - coppered
Insulation material: PVC
Roll: 100M

Color: Black/Red



LSP-CCA0.35BR-100-WL

Color: Transparent



LSP-CCA0.35TT-100-WL

Color: White



LSP-CCA0.35WE-100-WL

Well



Speaker Cable

Conductor: 2X0.50mm²
Conductor material: AL - coppered
Insulation material: PVC
Roll: 100M

Color: Black/Red



LSP-CCA0.50BR-100-WL

Color: Transparent



LSP-CCA0.50TT-100-WL

Color: White



LSP-CCA0.50WE-100-WL

Well



Speaker Cable

Conductor: 2X0.75mm²
Conductor material: AL - coppered
Insulation material: PVC
Roll: 100M

Color: Black/Red



LSP-CCA0.75BR-100-WL

Color: Transparent



LSP-CCA0.75TT-100-WL

Color: White



LSP-CCA0.75WE-100-WL

Well



Speaker Cable

Conductor: 2X1.00mm²
Conductor material: AL - coppered
Insulation material: PVC
Roll: 100M

Color: Black/Red



LSP-CCA1.00BR-100-WL

Color: Transparent



LSP-CCA1.00TT-100-WL

Well



Speaker Cable

Conductor: 2X1.50mm²
Conductor material: AL - coppered
Insulation material: PVC
Roll: 100M

Color: Transparent



LSP-CCA1.50TT-100-WL

Color: White



LSP-CCA1.50BR-100-WL

Well



Speaker Cable

Conductor: 2X2.00mm²
Conductor material: AL - coppered
Insulation material: PVC
Roll: 100M

Color: Black/Red



LSP-CCA2.00BR-100-WL

Color: Transparent



LSP-CCA2.00TT-100-WL

Well



Speaker Cable

Conductor: 2X2.50mm²
Conductor material: AL - coppered
Insulation material: PVC
Roll: 100M

Color: Black/Red




LSP-CCA2.50BR-100-WL

Color: Transparent



LSP-CCA2.50TT-100-WL



Well

Speaker Cable

Conductor: 2X4.00mm²
Conductor material: AL - coppered
Insulation material: PVC
Roll: 100M

Color: Black/Red



LSP-CCA4.00BR-100-WL

Color: Transparent



LSP-CCA4.00TT-100-WL

OFC Speaker Cables

Well



Speaker Cable

Conductor material: OFC copper
Insulation material: PVC
Insulation color: Black/ Red
Roll: 100M

Conductor: 2X0.35mm²
Composition: 12x0.19mm OFC



LSP-OFC0.35BR-100-WL

Conductor: 2X0.50mm²
Composition: 17x0.19mm OFC



LSP-OFC0.50BR-100-WL

Conductor: 2X0.75mm²
Composition: 26x0.19mm OFC



LSP-OFC0.75BR-100-WL

Conductor: 2X1.00mm²
Composition: 20x0.25mm OFC



LSP-OFC1.00BR-100-WL

Adapters

Well



RJ11 Adapter

Adapter: 1x RJ11(6P4C) Female - 2x RJ11(6P4C) Female

Color: Black



TEL-0036-BK-WL

Color: White



TEL-0036-WE-WL

Well



RJ11 Adapter

Adapter: 1x RJ11(6P4C) Female - 2x RJ11(6P4C) Female

Color: Black



TEL-0007BK-WL

Color: White



TEL-0007WE-WL

Well



RJ45 Adapter

Adapter: 1x RJ45(8P8C) Female - 2x RJ45(8P8C) Female

Color: Black



TEL-0036-8/BK-WL

Color: White



TEL-0036-8/WE-WL

Well



RJ45 Adapter

Adapter: 1x RJ45(8P8C) Male - 2x RJ45(8P8C) Female

Color: Black



TEL-0007-8/BK-WL

Cables

Well



Telephone Cable

Cablu telefon plat 4 fire
Roll: 100M

Color: Black




TEL-C4100F/BK-CU-WL

Color: White



TEL-C4100F/WE-CU-WL

CHROME



Shielded Alarm Cable

Conductor: CCA

Surface section: 4x0.22 mm²

Construction no. wire / diameter: 4x7/0.20mm



ALM-CCA/F/4-100-CHR

Surface section: 6x0.22 mm²

Construction no. wire / diameter: 6x7/0.20mm



ALM-CCA/F/6-100-CHR

Surface section: 10x0.22 mm²

Construction no. wire / diameter: 10x7/0.20mm



ALM-CCA/F/10-100-CHR

CHROME



Unshielded Alarm Cable

Conductor: CCA

Surface section: 6x0.22 mm²

Construction no. wire / diameter: 6x7/0.20mm



ALM-CCA/U/6-100-CHR

Surface section: 10x0.22 mm²

Construction no. wire / diameter: 10x7/0.20mm



ALM-CCA/U/10-100-CHR

Telecom connectivity

Plug covers

Well



RJ45 Plug Cover

RJ45 plug protection

Color: Black



TEL-0080-CAPBK-WL

Color: Blue



TEL-0080-CAPBE-WL

Color: Green



TEL-0080-CAPGN-WL

Color: Grey



TEL-0080-CAPGY-WL

Color: Orange



TEL-0080-CAPOE-WL

Color: Red



TEL-0080-CAPRD-WL

Color: White



TEL-0080-CAPWE-WL

Color: Yellow



TEL-0080-CAPYW-WL

Connectors & Plugs

Well



RJ11 Modular Telephone Jack

Modular telephone jack RJ 11 4P4C

Gold-plated contacts



TEL-0002-WL

Well



RJ11 Modular Telephone Jack

Modular telephone jack RJ 11 6P4C

Gold-plated contacts



TEL-0004-WL

Well



RJ12 Modular Telephone Jack

Modular telephone jack RJ 12 6P6C

Gold-plated contacts



TEL-0006-WL

Well



RJ45 Network Plug

RJ45 Network Plug CAT 6 shielded

Gold-plated contacts



TEL-0080S-WL

Well



RJ45 Network Plug

RJ45 Network Plug CAT 6 unshielded

Gold-plated contacts



TEL-0080-WL

Well



RJ45 Network Plug

RJ45 Network Plug CAT 6 shielded

Gold-plated contacts



TEL-1080S-WL

Well



RJ45 Network Plug

RJ45 Network Plug CAT 6 unshielded

Gold-plated contacts



TEL-1080-WL



Power Cables

Cables With Connectors

Well



Power Cable for Cassette Player

Cable: H03VH2-F 2x0.5mm²
Connector 1: Euro
Connector 2: IEC C7
Color: Black
Cable length: 1.5M



CABLE-701-1.5

Well



Monitor Power Cable

Cable length: 2.5M
Cable: H05VV-F 3x0.75mm²
Connector 1: IEC-320-C14
Connector 2: IEC-320-C13
Color: Black



CABLE-705-2.5

Well



T5 Interconnection Cable

Cable for parallel connection of T5 tubes, Well
Cable length: 20cm



CABLE-CON/T5-0.20WE-WL

Well



Power Cable with Switch

Cable: 3x0.75mm²
Voltage: 230V AC
Nominal current: 2.5A
Protection class: IP20

.....
Cable length: 2M



CABLE-PWSW-1XEU/2M-WE-WL

.....
Cable length: 3M



CABLE-PWSW-1XEU/3M-WE-WL

Cables

Well



T5 Power Supply Cable With Switch

T5 Power Supply Cable
Cable length: 1.5M
With switch



CABLE-PW/T5/I-1.5WE/SW-WL

Well



T5 Power Supply Cable With Switch

T5 Power Supply Cable
Cable length: 1.5M
With switch



CABLE-PW/T5/O-1.5WE/SW-WL

Computer & Networking

Cables

Well



Lightning - USB 2.0 Cable

Connectors: USB & Lightning
Length: 1.2M
Color: Black
Resistant nylon coating, mesh type
Bending resistant
Output current: 2.4A (max)



CABLE-USB/LIGHT-PR1.2BK-WL

Well



Lightning 2in1 Adapter Cable, Dual Port

Connectors: USB & Lightning Male + Lightning Female
Length: 1M
Color: White
Material: PVC
Charge current: 2A
Function: iPhone data upload and transfer, listening to music and answering phone calls



CABLE-USB/LIGHTX2-1.0WE-WL

Well



USB-C - USB 2.0 Cable

Conectors: USB și USB-C
Length: 1.2M
Color: Black
Resistant nylon coating, mesh type
Bending resistant
Output current: 2.4A (max)



CABLE-USB/USBC-PR1.2BK-WL

Well



MicroUSB - USB 2.0 Cable

Conectors: USB și microUSB
Length: 1.2M
Color: Black
Resistant nylon coating, mesh type
Bending resistant
Output current: 2.4A (max)



CABLE-USB/UUSB-PR1.2BK-WL

Well



USB-C - Displayport 4K Cable

USB Type C (Thunderbolt 3 compatible) with HDMI Male / HDMI 4K Adapter cable, for the latest devices: MacBook Pro 2016, MacBook 2015, Chromebook Pixel, Samsung Galaxy S8 / S8 Plus, Mate10, LG V300, HTC U Ultra et.
Plug and play, the cable allows you to directly connect a USB / C / tablet / smartphone device to an active DP display.
Able to deliver digital audio and video signal.
Supports resolution up to 4K * 2K (3840 * 2160) at 60Hz. Reversible compatibility with 1080p.
Gold-plated connectors designed for maximum conductivity. 1.8M cable length



CABLE-USBC-DP/4K60-1.8BK-WL

Well



USB-C - HDMI 4K Cable

USB Type C (Thunderbolt 3 compatible) with HDMI Male cable,
4K HDMI Adapter for the latest MacBook Pro 2017, MacBook 2015, Chromebook Pixel, Samsung Galaxy S8 / S8 Plus, Mate 10, LG V300, HTC Ultra. The plug and play cable allows you to directly connect a USB / C / tablet / smartphone device to an active HDD display.
Able to deliver digital audio and video signal.
Supports resolution up to 4K * 2K (3840 * 2160) at 30Hz. Reversible compatibility with 1080p.
Gold-plated connectors designed for maximum conductivity. 1.8M cable length

Input frequency: 30 Hz



CABLE-USBC-HDMI/4K30-1.8BK-WL

Input frequency: 60 Hz



CABLE-USBC-HDMI/4K60-1.8BK-WL

Well



USB-C - VGA Full HD Cable, 60Hz

USB Type C (Thunderbolt 3 compatible) with VGA cable / adapter, for the latest devices: MacBook Pro 2016, MacBook 2015, Chromebook Pixel, Samsung Galaxy S8 / S8 Plus, Mate10, LG V300, HTC U Ultra etc.
The plug and play cable allows you to directly connect a USB / C / tablet / smartphone device to an active DP display.
Able to deliver digital audio and video signal.
Supports resolution up to 1920x1080P reversible compatibility with 720p.
Gold-plated connectors designed for maximum conductivity. 1.8M cable length



CABLE-USBC-VGA/FHD60-1.8BK-WL

Computer & Networking

PC Acces

Well



Bluetooth Transmitter and Receiver


Bluetooth version: 4.2
Bluetooth range: ~ 8M
Standby time: 35h
Built-in battery: 450mAh
Power Input: DC 5V / 500MA



ADAPT-BT-COMFY-WL

FTP Cables

CHROME



FTP 5E Cable

Conductor: solid copper aluminum
Roll length: 305M



FTP5E-CCA-305-CHR



Well


FTP 5E Cable

Conductor: solid copper
Cable section: 0.50mm
Roll length: 305M



FTP5E-CU-305-WL

Well




FTP 6 Cable

Conductor: cupru solid
Roll length: 305M



FTP6-CU-305-WL

Well



FTP 5E Cable

Conductor: solid copper OFC 0.50mm²
Support wire, made of galvanized steel

Roll length: 305M



FTPME85E-CU-305-WL

Roll length: 500M



FTPME85E-CU-500-WL

Converters

Well



Audio & USB Power Supply VGA to HDMI Cable

Connector1: VGA with audio & USB power

Connector2: HDMI Male

Connector type: Straight

Cable length: 1.8M, Color: Black

Conductor: Copper

Outer material: PVC

CABLE-VGA/A-HDMI1.8BK-WL



Computer & Networking

Telephone cables

Well



Plugged Telephone Cable

RJ11 (6P4C) 7 / 0.10 CCS
Length: 3M
Color: Black

Cable length: 3M



TEL-0012-3BK-WL

Cable length: 6M



TEL-0012-6BK-WL

Cable length: 10M



TEL-0012-10BK-WL

Cable length: 15M



TEL-0012-15BK-WL

Well



Plugged Telephone Cable

RJ11 (6P4C) 7 / 0.10 CCS
Length: 3M
Color: White



TEL-0012-3WE-WL

Well



Coiled Receiver Cable

Plug: RJ9 (4P4C)
Cable 7 / 0.10 CCS
Color: Black

Cable length: 2M



TEL-0017-2BK-WL

Well



Coiled Receiver Cable

Plug: RJ9 (4P4C)
Cable 7 / 0.10 CCS
Color: White

Cable length: 2M



TEL-0017-2WE-WL

Cable length: 4M



TEL-0017-4WE-WL

Plugs

Well



Modular Telephone Plug

Plug: RJ11 (6P4C)
Color: Black

Color: Black



TEL-0008-8/BK-WL

Color: White



TEL-0008-8/WE-WL

Well



Modular Telephone Plug

Connections: RJ11 (6P4C) Female
Adapter Type: RJ11
Outer material: ABS

Color: Black



TEL-0008-BK-WL

Color: White



TEL-0008-WE-WL

UTP Cables

CHROME




UTP 5E Cable

Conductor: Copper aluminum
Roll length: 305M
Solid



UTP5E-CCA305-CHR

CHROME



UTP 5E Cable

Conductor: Copper aluminum
Roll length: 305M
Stranded



UTP5E-CCAS-305-CHR

Well



UTP 5E Cable

8 copper wires
Conductor: solid copper
Wire section: 0.49mm
Roll length: 305M



UTP5E-CU-305-WL

Well



UTP 6 Cable

Conductor: 23AWG solid copper
Insulation: HD-PE
Minimum thickness: 0.22mm
Diameter: 1.0/ 1.02 +/- 0.01 mm
Outer sheath: PVC - Diameter: 6.2 +/- 0.2mm
Roll length: 305M



UTP6-CU-305-WL

Satellite & Antenna

Connectors & Plugs

Well



F Connector

Twist-On connectors for connection to the cable without using a special crimp plier.

Colour: Silver

Material: Metal

Gender of contacts: Male

Connector side A: Straight

Plating: Nickel

Diameter: 7 mm



FC-001-WL

Diameter: 5 mm



FC-003-WL

Diameter: 6.4mm



FC-010-WL

Diameter: 5.5mm



FC-012-WL

Diameter: 7.5mm



FC-013-WL

Well



Coax Adapter

Connections: 2x F Female

Colour: Silver

Adapter type: XLR

Outside material: Metal

Plating: Nickel

Panel mounting



FC-018-WL

Well



Satellite & Antenna Adapter

Adapter from coax plug to F-connector socket

Connection1: Coax Male

Connection2: F Female

Colour: Silver

Adapter type: XLR

Outside material: Metal

Plating: Nickel



FC-025-WL

Well



F Connector

F plug with RG6 crimping, with rubber ring

Colour: Silver

Connector Type: F Plug

Contact type: Male

Material: Metal

Nickel plating



FC-100-WL

Well



Angled F - Coaxial Adapter

Connector1: F Female

Connector2: Coaxial Female 90 °

Color: Silver

Outer material: Metal

Plating: Nickel



FC-CX9.5F-WL

Well



Angled F - Coaxial Adapter

Connector1: F Female

Connector2: Coaxial Male 90 °

Color: Silver

Outer material: Metal

Plating: Nickel



FC-CX9.5M-WL

Well



BNC Connector

Color: Silver

Plug: Male

Connector side: Right

Material: Metal

Impedance: 50 Ohm

Plating: nickel

Suitable for: RG6, 304, URM68TC

Max cable diameter: 6.5mm



BNC-001-WL

Well



Coaxial Connector

Colour: White

Connector type: IEC Connector

Gender of contacts: Male

Connector side A: Angled

Diameter: 7 mm

Plating: Nickel



CX PLUG-WL

Satellite & Antenna

Well



Coaxial Connector With Screw Fixing

Color: Silver
Connector type: IEC Connector
Contact type: Female
Material: Metal
Diameter: 7.0 mm
Nickel plated



CX SOCKET3-WL

Cables

Well



RG58 Coaxial Cable

Type: RG58C / U
Impedance: 50 Ohm
Conductor: 19 x 0.18 mm
Material: Copper-coated
Outer material: Black PVC
Outer diameter: 5.0 mm
Protection: Copper-coated
Roll length: 100M



RG58-CU/CU-100-WL

Well




RG59 Coaxial Cable with Power Supply

Conductor: 0.81mm copper
3.7mm FPE + 16 * 8 * 0.12mm CCA shield 93%
Sheath: 6.0mm PVC
Power supply: 2C (7 * 0.38mmCCA + 1.8mm PE), 2x 0.75mmP
Roll length: 305M, Color: Black



RG59/2C-CU/CCA-305-WL

Well



RG59 Coaxial Cable

Coaxial cable, RG59 75Ohm
Conductor: 1x0.643mm copper bar
Screening: 48x0.10 mm With Al + PE foil
Coat: PVC Outer diameter: 6.0 mm
Color: White, Roll length: 100M



RG59-CU/CU-100-WL

Well



RG6 Coaxial Cable

RG6 coaxial cable, 75R
Conductor: copper bar
Screening: copper wire
Size 48X0.12.
Roll Length: 100M, Color: White



RG6-CU/CU-100-WL

CHROME



RG6 Coaxial Cable

Conductor: copper steel
Shielding: 16x2x0.12 mm Al + foil Al + PE
Roll Length: 100M
Color: White



RG6-CCS/AL-100-CHR

Well



RG6 Coaxial Cable

RG6 coaxial cable, 75R
Conductor: copper steel
Wire material: copper steel, shielded with AL + Al & Mg foil
Size: 48X0.12.
Roll length: 100M, Color: White

Roll length: 100M



RG6-CCS/AL-100-WL

Roll length: 305M



RG6-CCS/AL-305-WL

Satellite & Antenna

Well



RG6 Coaxial Cable

Conductor: copper steel
Triple shielded with AL + AL & Mg foil 48X0.12 + AL foil
Color: White
.....
Roll length: 100M



RG6-CCS/AL-TRISLD-100-WL

.....
Roll length: 305M



RG6-CCS/AL-TRISLD-305-WL

Well



RG6 Coaxial Cable

RG6 coaxial cable, stranded, 75R
Wire material: copper steel, shielded with AL + AL & Mg foil
Size: 48X0.12
Roll length: 305M



RG6MES-CCS/AL-305BK-WL

Well



RG6 Coaxial Cable

Conductor: copper steel
Triple shielded: AL + AL foil & Mg 64X0.12 + AL foil
Roll length: 305M
Color: Black



RG6MES-CCS/AL-TRISLD-305BK-WL

Well



RG6 Coaxial Cable

Conductor: copper bar
Shielding: 4.6mm FPE + Bonded AL + 16 * 3 * 0.12mm copper
Sheath: 6.8mm PVC
Color: Black
Stranded: 1.15mm steel
Length: 305M, Color: White



RG6MES-CU/CU-305-WL

Cable Management

Well



Cable Clips for Round Cables

Inaltime: 6.7mm
Color: Black
Material: PE
Nail size: 1.7x14mm

.....
Diameter: 5mm



CLPR-5BK-WL

.....
Diameter: 6mm



CLPR-6BK-WL

.....
Diameter: 7mm



CLPR-7BK-WL

Computer & Networking

Adapters

Well



Adapter: Lightning to Ethernet

Specially designed and used for iPhone and iPad. With Ethernet: 10Mbps / 100Mbps, provides access to super-fast Internet speeds, at home or in the office.

Plug & Play
Cable length 1M
Compact design



ADAPT-LIGHT-NW-WL

Well



USB2.0 Adapter to Ethernet 100Mbps

Full performance of: 10/100 Mbps Fast Ethernet on USB 2.0 480 Mbps
According to the standard specifications of USB 2.0 and 1.1

IEEE 802.3u 100BASE-T, TX compatible
High-speed USB 2.0 device with power supply capacity
Supports 4 endpoints on USB; full-duplex or semi-duplex on Fast Ethernet
Supports automatic charging of Ethernet ID, USB configuration, and adapter



ADAPT-USB2.0-NW-WL

Well



USB2.0 Adapter to Ethernet 100Mbps & 3x USB

Portable USB hub, 3 ports, with fast Ethernet network adapter.

Ethernet for Windows, Mac, Linux designed for tablets, ultra books, laptops etc.

Add 3x USB 2.0 ports and 1x fast ethernet port for your devices directly for fast data transfer at 480Mbps and network connection up to 100Mbps.

USB 2.0 offers Super Speed connection speeds up to 480Mbps

Plug-and-play after the initial installation of the driver
Automatically supports and detects 10 / 100Mbps connections via USB



ADAPT-USB2.0-USB2.0X3/NW-WL

Well



USB3.0 Adapter to Gigabit Ethernet

Compact design, you can easily add a Gigabit Ethernet port to your notebook or desktop, equipped with USB 3.0 port.

Supports 10/100/1000 Mbps transfer speeds
Compatible with IEEE 802.3, 802.3u and 802.3ab (10BASE-T, 100BASE-TX and 1000BASE-T).

USB-Powered. Supports full duplex and half duplex modes

Compatible with previous versions USB 2.0 and 1.1



ADAPT-USB3.0-GB-WL

Well



USB3.0 Adapter to Gigabit Ethernet & 3x USB3.0

Portable USB HUB, with 3 USB 3.0 ports, and with Gigabit Ethernet LAN network adapter for Windows, Mac, Linux

Designed for tablets, ultrabooks, laptops, etc.

Add 3x USB 3.0 ports and a Gigabit Ethernet port to your devices for fast data transfer with speeds up to 5Gbps and network connection up to 1000Mbps.

USB 3.0 offers Super Speed connectivity with speeds up to 5.0Gbps

Plug-and-play after the initial installation of the driver
Automatically supports and detects 10/100 / 1000Mbps USB connections



ADAPT-USB3.0-USB3.0X3/GB-WL

Well



USB-C Adapter to Displayport 4K

The USB-C adapter (Thunderbolt 3 compatible) to Displayport 4K 60Hz, is compatible with the latest devices such as: MacBook Pro, MacBook, Chromebook Pixel, Samsung Galaxy S8/ S8 Plus, Mate 10, LG V300, HTC U Ultra ect.

Simple to plug, plug and play, the adapter allows you to directly connect a USB-C computer / tablet / smartphone to an HDMI compatible display.

It transmits both digital audio and video signals. Supports resolutions up to 4K 30Hz at 60Hz. It is also compatible with 1080p resolutions.



ADAPT-USBC-DP/4K60-WL

Computer & Networking



USB-C Adapter Male to USB 3.0 Female

Compatible with most mobile devices with USB Type-C OTG port
Can be used to connect USB devices such as external memory, keyboard, mouse
Small size, easy to use
Connection 1: USB Type-C
Connection 2: USB 3.0
OTG function
Material: metal
Color: silver



ADAPT-USBCM-USB3.0F-WL



USB-C 3.1 Adapter to VGA

The USB-C adapter (Thunderbolt 3 compatible) to VGA 1080p is compatible with the latest devices, for example MacBook Pro, MacBook, Chromebook Pixel, Samsung Galaxy S8 / S8 Plus, Mate 10, LG V300, HTC U Ultra ect.
Easy to connect, plug and play adapter allows you to connect directly to a computer USB-C/ tablet/ smartphone (another model DP) to a compatible VGA display.
It transmits both digital audio and video signals. Supports resolutions up to 1920 * 1080 at 60Hz. It is also compatible with 720p resolutions. Aluminum alloy housing



ADAPT-USBC-VGA/FHD60-WL



USB2.0 Adapter - 7.1 Virtual Audio Sound

External USB stereo sound adapter, input 3.5mm stereo headphone jack and microphone for Windows Mac and Linux
Plug and play No drivers required
Connectors: USB Type A, stereo headphone output jack, mono microphone input jack.
It does not require the installation of drivers for Windows XP/ Vista/ 7/ 8/ 8.1/ 10/ Linux/ Mac OSX.
USB power supply, no external power required. Cable length: 10cm



ADAPT-USB-ST7.1/AL1/0.1-WL



USB-C adapter to 3x USB3.0 & Card Reader

This 5-in-1 USB Hub offers 3xUSB 3.0 ports, 1x SD card reader and 1xMicro SD
Superspeed Data 5Gbps:
Transfer data at speeds up to 5 Gbps through 3 USB 3.0 ports.
SD & Micro SD Card Reader:
Access the SD & Mirco SD file at USB 3.0 speed



ADAPT-USBC-USB3.0X3/CR-WL



USB-C 3.1 Adapter - VGA, USB3.0, USB-C

Extend the output of a single USB-C port to multiple input ports, a VGA port, a USB 3.0 port, and a USB-C input.
USB-C supports PD (Power Delivery) to power supply your devices: MacBook, Chromebook Pixel and more. Supports mirror display of laptops on any VGA compatible monitor or projector etc.
Compatible with the latest MacBook and other PCs. Low power consumption, direct USB power supply. Simple connection, plug and play. Cable length: 15cm
Input port: 1x USB-C Male
Output port: 1x VGA Female; 1x USB 3.0 Female; 1x USB-C Female



ADAPT-USBC-VGA/USB3.0/PD-WL



USB-C Adapter to Gigabit Ethernet & 3x USB3.0

Portable HUB with 3 USB 3.0 ports, and with Gigabit Ethernet LAN network adapter for Windows, Mac, Linux
Designed for tablets, ultrabooks, laptops, etc.
Add 3x USB 3.0 ports and a Gigabit Ethernet port to your devices for fast data transfer with speeds up to 5Gbps and network connection up to 1000Mbps.
USB 3.0 offers Super Speed connectivity with speeds up to 5.0Gbps
Plug-and-play after the initial installation of the driver
Automatically supports and detects 10/100 / 1000Mbps USB connections



ADAPT-USBC-USB3.0X3/GB-WL



USB2.0 Adapter - 7.1 Virtual Audio Sound

External USB stereo sound adapter, input 3.5mm stereo headphone jack and microphone for Windows Mac and Linux
Plug and play No drivers required
Connectors: USB Type A, stereo headphone output jack, mono microphone input jack.
It does not require the installation of drivers for Windows XP/ Vista/ 7/ 8/ 8.1/ 10/ Linux/ Mac OSX.
USB power supply, no external power required



ADAPT-USB-ST7.1/PL1-WL

Well



USB2.0 Adapter - 7.1 Virtual Audio Sound

External USB stereo sound adapter, 3.5mm stereo headphone jack and microphone for Windows Mac and Linux
Plug and play No drivers required
Connectors: USB Type A, stereo headphone output jack, mono microphone input jack.
It does not require the installation of drivers for Windows XP/ Vista/ 7/ 8/ 8.1/ 10/ Linux/ Mac OSX.
USB power supply, no external power required. Cable length: 15cm



ADAPT-USB-ST7.1/PL2/0.15-WL

Well



USB2.0 to 7.1 Virtual Audio Sound

Connector1: USB 2.0
Keys: turn off microphone, sound off, volume up/down
Output: 4 x 3.5mm plugs
Virtual 7.1 sound



ADAPT-USB-ST7.1/PL3- WL

Well



USB-C to Lightning Adapter

Connector1: USB-C male
Connector2: Lightning Female
Color: Black/ Gray
Data transfer & upload



ADAPT-USBC-LIGHT-WL

PC Acces Adapters

Well



Chromecast Adapter With USB Power Supply

Chromecast's Micro USB to Ethernet Adapter allows you to connect your Chromecast to Ethernet at a speed of 10/100 Mbps, with power supply, via USB port
Compatible with micro USB Fire Stick (2nd GEN), new Fire TV (2017), Chromecast Ultra / 2/1 / Audio, Google Home Mini, Raspbbery Pi Zero etc. WIFI through Micro USB port



ADAPT-CHRC/USB-NW-WL

Well



USB-C to USB-C & Jack Adapter

Connector1: USB-C Male
Connector2: 3.5mm Female jack
Connector 3: USB-C Female
Cable length: 7 cm
Color: Black



ADAPT-USBCM/3.5MMF/USBCF-0.07BK-WL

Well



USB-C to USB-C & Jack Adapter

Connector1: USB-C Male
Connector2: 3.5mm Female jack
Connector3: USB-C Female
Cable length: 13 cm
Color: White/ Black



ADAPT-USBCM/3.5MMF/USBCF-0.13BK-WL

Well



USB-C to Jack Adapter

Connector1: USB-C Male
Connector2: 3.5mm Female jack
Cable length: 11 cm
Color: White



ADAPT-USBCM/3.5MMF0.11WE-WL

Computer & Networking

Travel Adapters

Well



Universal Travel Adapter Set

Input voltage: 100 -240V AC
Max: 6A@ 125V, 3A@ 250V
Sockets: US, US, AUS, UK
Material: ABS, IP20
The adapter doesn't convert the voltage



ADAPT-PLUG-UNIV/WE-WL

Well



Universal Travel Adapter Set With USB

Input voltage: 100 -240V AC
Max: 6A@125V, 3A@250V
USB Output: 5V, 1000 mA
Sockets: EU, SUA, AUS, UK
Material: ABS, IP20
The adapter doesn't convert the voltage



ADAPT-PLUG-UNIV/USB/WE-WL



Adapters

Well



HDMI to VGA Adapter Cable With Audio & Supply

This HDMI to VGA adapter cable comes with a 3.5mm independent jack, which ensures audio synchronization for a more flexible viewing experience of a movie. MicroUSB power supply, solves most of the compatibility issues, and achieves a more stable conversion.



ADAPT-HDMI/USUB-VGA/A-0.15BK-WL

Well



HDMI to VGA Adapter Cable

HDMI to VGA adapter cable, which offers you the interconnection of notebook / laptop devices (with an HDMI interface) with projectors / analog displays (with VGA connector). Cable length: 15 cm, Gold contacts



ADAPT-HDMI-VGA-0.15BK-WL

Well



HDMI to VGA Adapter

Connection 1: HDMI Male
Connection 2: VGA Female (15-pin)
Cable length: 0.2M
Maximum resolution: Full HD 1080p (60Hz)
Color: Black



ADAPT-HDMIM/VGAF-0.2BK-WL

Color: White



ADAPT-HDMIM/VGAF-0.2WE-WL

Well



USB-C to Audio Adapter

Connector1: USB-C Male
Connector2: 3.5mm Female jack
Connector3: USB-C Female
Color: Black
Golden connectors, Power delivery (PD)



ADAPT-USBC-3.5MM/PD-WL

Well



USB-C 3.1 - HDMI 4K Adapter

The USB-C adapter (Thunderbolt 3 compatible) on the HDMI 4K is compatible with the latest devices, for example: MacBook Pro, MacBook, Chromebook Pixel, Samsung Galaxy S8 / S8 Plus, Mate 10, LG V300, HTC U Ultra ect.

Simple to plug, plug and play, the adapter allows you to directly connect a USB-C / tablet / smartphone (another model with DP) to an HDMI compatible display.

It transmits both digital audio and video signals. Supports resolutions up to 4K * 2K (3840 * 2160) at 30Hz. It is also compatible with 1080p resolutions.

Input frequency: 30Hz



ADAPT-USBC-HDMI/4K30-WL

Input frequency: 60Hz



ADAPT-USBC-HDMI/4K60-WL

Well



USB-C 3.1 - HDMI, USB3.0 & USB-C PD Adapter

Extend the output of a single USB-C port into multiple input ports, an HDMI port, a USB 3.0 port, and a USB-C input.

USB-C supports PD (Power Delivery) for powering your devices, MacBook, Chromebook Pixel and more. Supports HDMI 1.4, 4K video and mirroring the display of laptops on any HDTV or monitor or HDMI compatible projector etc.

Simple connection, plug and play

Cable length: 15cm, Input port: 1x USB-C Male
Output port: 1x HDMI Female, 1x USB 3.0 Female, 1x USB-C Female



ADAPT-USBC-HDMI/USB3.0/PD-WL

Well



USB-C - HDMI, 2x USB3.0 & Card Reader Adapter

HD HDMI Port: Mirror or expand the screen through the HDMI port and stream 4K UHD or Full HD 1080p video directly to the HDTV, monitor or projector.

SD/ TF card reader slots: compatible with SDHC, SDXC, micro SDHC and micro SDXC cards. SD and TF slots can work at the same time
Input: USB-C Male, Outputs: 1x HDMI, 2x USB3.0, SD & TF reader



ADAPT-USBC-HDMI/USB3.0X2/CR-WL

Well



USB-C - HDMI, 2x USB3.0 & USB-C PD Adapter

HD HDMI Port: Mirror or expand the screen through the HDMI port and stream 4K UHD or Full HD 1080p video directly to the HDTV, monitor or projector.

USB-C Female port: Supports PD charging for host devices. High speed: 2x USB 3.0 SuperSpeed ports transfer data up to 5Gbps.

Input: USB-C Male, Outputs: 1x HDMI, 2x USB3.0, USB-C PD port (power delivery)



ADAPT-USBC-HDMI/USB3.0X2/PD-WL

Well



USB-C to HDMI, USB3.0 & USB-C Adapter

Input: USB-C Male
Output: USB-C, 3x USB3.0, 4K HDMI
Color: Black
Power delivery (PD 60W)



ADAPT-USBC-HDMI/USB3.0X3/PD-WL

Well



USB-C to HDMI, USB3.0, Card Reader & USB-C Adapter

Input: USB-C Dad
Output: USB-C, 2x USB3.0, Micro SD & SD card reader, 4K HDMI
Color: black
Gold connector, power delivery (PD 60W)



ADAPT-USBC-HDMI/USB3.0X2/PD/CR-WL

Well



USB-C 3.1 - HDMI 4K & VGA Adapter

The USB-C adapter (Thunderbolt 3 compatible) to HDMI 4K and VGA 1080p, is compatible with the latest devices, for example: MacBook Pro, MacBook, Chromebook Pixel, Samsung Galaxy S8 / S8 Plus, Mate 10, LG V300, HTC U Ultra ect.
Simple Plug and play, the adapter allows you to directly connect a USB-C/ tablet/ smartphone to an HDMI / VGA compatible display.
It transmits both digital audio and video signals.
HDMI - supports resolutions up to 4K * 2K (3840 * 2160) at 30Hz.
VGA - supports resolutions up to 1920 * 1080p at 60Hz.



ADAPT-USBC-HDMI/VGA-WL

Well



OTG USB to Mini USB Adapter

Connector1: OTG USB motherboard
Connector2: Mini USB Dad
Cable length: 15 cm



ADAPT-USBF/MUSB/OTG0.15BK-WL

Well



USB3.0 to USB-C OTG Adapter

Connector 1: USB 3.0 Female
Connector 2: USB-C Male
Color: Black
With this adapter you can connect a USB memory to a smartphone that has a USB Type-C connector.



ADAPT-USBF/USBCM-01-WL

Well



USB3.0 to USB-C OTG Adapter

Connector1: USB-C Male
Conector2: USB 3.0 Female
Color: Black
With this adapter you can connect a USB memory to a smartphone that has a USB Type-C connector.



ADAPT-USBF/USBCM-02-WL

Well



OTG USB to Micro USB Adapter

Connector1: USB OTG Female
Conector2: Micro USB Male
Conector3: Micro USB Female
Cable length: 15 cm
Color: Black



ADAPT-USBF/UUSB2/OTG-0.15BK-WL

Well



Displayport to HDMI Adapter

Connector 1: DisplayPort Male
Connector 2: HDMI Female
Gold plated
Connector type: Straight
Color: anthracite
Conductor: copper
4K x 2K, 60Hz, active
Outer material: PVC



ADAPT-DPM-HDMIF-WL

Well



Displayport to VGA Adapter

Connector 1: DisplayPort Male
Connector 2: VGA Female
Gold plated, Color: Black
Connector type: Straight
Conductor: copper, 1080p
Outer material: PVC



ADAPT-DPM-VGAF-WL

Well



DVI to Displayport Adapter

Connector 1: DisplayPort Male
Connector 2: DVI Female
Connector type: Straight
Cable length: 15 cm
Color: Black
Conductor: copper
Outer material: PVC



ADAPT-DVIF/DPM0.15BK-WL

Well



DVI to VGA Adapter

Type: DVI-D 24 + 1p
Connector 1: DVI-D Male
Connector 2: VGA Female
Gold plated, Color: Black
Connector type: Straight
Cable length: 15 cm
Conductor: copper
Outer material: PVC



ADAPT-DVIM/VGA0.15BK-WL

Well



VGA to DVI-D Adapter

Type: DVI-D 24 + 1p
Connector 1: DVI-D Male
Connector 2: VGA Female
Gold plated, Connector: Straight
Cable length: 15 cm, Color: Black
Conductor: copper
Outer material: PVC



ADAPT-VGAF/DVIM0.15BK-WL

Well



HDMI to Displayport Adapter

Connector 1: DisplayPort Male
Connector 2: HDMI Female
Gold plated
Color: Black, Cable length: 15 cm
Connector type: Straight
Conductor: copper
Outer material: PVC



ADAPT-HDMIF/DPM0.15BK-WL

Well



HDMI to Displayport Adapter

Connector 1: DisplayPort Male
Connector 2: HDMI Female
Gold plated
Color: Black, Cable length: 20 cm
Connector type: Straight
Conductor: copper
Outer material: PVC



ADAPT-HDMIF/DPM02BK-WL

Well



HDMI to DVI Adapter

Connector 1: HDMI female 19-pin
Connector 2: DVI-D male 24 + 1 pin
Color: Black



ADAPT-HDMIF/DVIMGD-WL

Well



HDMI to HDMI Adapter

Connector 1: HDMI Female
Connector 2: HDMI Female
Color: Black



ADAPT-HDMIF/HDMIF-WL

Well



HDMI to Mini Displayport Adapter

Connector 1: HDMI Female
Connector 2: Mini Displayport Male
Cable length: 15 cm
Color: Black



ADAPT-HDMIF/MDPM0.15BK-WL

Well



HDMI to Micro HDMI Adapter

Connector 1: Micro HDMI D Male
Connector 2: HDMI 19-pin Female
Gold connectors, Color: Black



ADAPT-HDMIF/UHDMIM-WL

Well



HDMI to VGA Adapter

Connector 1: HDMI Male
Connector 2: VGA Female
Cable length: 20cm, Color: Black
Golden connectors & audio jack cable



ADAPT-HDMIM/VGAF/A0.2BK-WL

Well



HDMI to VGA & Audio Adapter

Connector 1: HDMI Male

Connector 2: VGA mother

Color: Black

Golden connectors & Audio



ADAPT-HDMIM/VGAF/A-WL

Well



Lightning to Jack Adapter

Connector 1: Lightning Male

Connector 2: 3.5mm Female jack

Cable length: 10 cm

Color: White



ADAPT-LIGHTM/3.5MMF0.1WE-WL

Well



Lightning to USB-C Adapter

Connector 1: Lightning Male

Connector 2: USB-C Female

Color: Black/ Gray

Data transfer & charging



ADAPT-LIGHT-USBC-WL

Well



Mini Displayport to HDMI Adapter

Connector 1: mini Displayport Male

Connector 2: HDMI Female

Cable length: 20 cm

Color: Black, 4K x 2K 60Hz, active

Golden connectors



ADAPT-MDPM-HDMIF-WL



HDMI Cables



Well

High Speed 1,4 HDMI Cable With Ethernet

Length: 1.0M
Connectors: HDMI 15 + 1 pin male - HDMI 15 + 1 pin male
Golden connectors
Outer material: PVC
Maximum resolution: 3840 x 2160
HDMI Ethernet channel
Audio feedback channel
3D via HDMI



CABLE-HDMI/HDMI/1.4-1.0



Well

High Speed 1,4 HDMI Cable With Ethernet

Cable length: 1.5M
14 + 1p Male - HDMI 14 + 1p Male
Gold plated connectors
Material conductor: CCS



CABLE-HDMI/HDMI/1.4B-1.5



Well

High Speed 1,4 HDMI Cable With Ethernet

Connection 1: HDMI Male
Connection 2: HDM, Male 90 °
Connectors: golden
Cable length: 2M
Other standards: 3D, HDMI Ethernet Channel (HEC)



CABLE-HDMI/HDMI/1.4-2.0-WL



Well

High Speed 1,4 HDMI Cable With Ethernet

Connectors: HDMI 15 + 1 pin male - HDMI 15 + 1 pin male
Golden connectors
Outer material: PVC
Maximum resolution: 3840 x 2160
HDMI Ethernet channel
Audio feedback channel
3D via HDMI
Cable length: 1.5M



CABLE-HDMI/HDMI/1.4-1.5-WL

Cable length: 2M



CABLE-HDMI/HDMI/1.4-2.0-WL

Cable length: 3M



CABLE-HDMI/HDMI/1.4-3.0-WL

Cable length: 5M



CABLE-HDMI/HDMI/1.4-5.0-WL



Well

Super Speed 2,0 OFC HDMI Cable With Ethernet

Connections: 2x HDMI Male
Contact material: gold plated
Maximum resolution: 4K Ultra HD 2160p (60Hz)
AWG: 30, Color: Black

Cable length: 1.5M



CABLE-HDMI/HDMI/2.0-1.5-WL

Cable length: 2M



CABLE-HDMI/HDMI/2.0-2.0-WL

Cable length: 3M



CABLE-HDMI/HDMI/2.0-3.0-WL

Cable length: 5M



CABLE-HDMI/HDMI/2.0-5.0-WL



Well

Super Speed 2,0 OFC HDMI Cable With Ethernet

Connections: 2x HDMI Male, 1x 90° angled
Contacts: gold-plated
Resolution: 4096 x 2160
Diameter: 6 mm
Colour: Black

Cable length: 1M



CABLE-HDMI/HDMI/2.0-1.0-WL

Cable length: 1.5M



CABLE-HDMI/HDMI/2.0-1.5-WL

Cable length: 2M



CABLE-HDMI/HDMI/2.0-2.0-WL

Cable length: 3M



CABLE-HDMI/HDMI/2.0-3.0-WL

Cable length: 5M



CABLE-HDMI/HDMI/2.0-5.0-WL



Well

HDMI Cable, With VGA Chip + Audio & USB Power Supply

This HDMI to VGA adapter cable comes with an independent 3.5mm jack, which ensures audio synchronization for a more flexible movie viewing experience.

USB power supply solves most of the compatibility issues and achieves a more stable conversion.

Cable length: 1.8M

Connector 1: VGA Male

Connector 2: HDMI Male



CABLE-HDMI/USB-VGA/A-1.8BK-WL

Well



Well

HDMI Cable, With VGA Chip + Audio & Micro USB Power Supply

This HDMI to VGA adapter cable comes with an independent 3.5mm jack, which ensures audio synchronization for a more flexible movie viewing experience.

Micro USB power supply solves most of the compatibility issues and achieves a more stable conversion.

Cable length: 1.8M

Connector 1: VGA Male

Connector 2: HDMI Male



CABLE-HDMI/USB-VGA/A-1.8BK-WL

Well



HDMI Cable, With VGA Chip

The HDMI to VGA adapter cable, offers you the interconnection of notebook/ laptop devices (with an HDMI interface) with projectors/ analog displays (with VGA connector).

Connect your laptop to create a desktop extension (with VGA connector) or in mirror mode with VGA projectors.

Integrated chip on the HDMI connector for real color performance. Cable length: 1.8M



CABLE-HDMI-VGA-1.8BK-WL

Displayport Cables

Well



Displayport to HDMI Cable

Connector1: Displayport Male

Connector2: HDMI Male

Resolution: 4K 60Hz active

Connector: Right, Gold plated

Cable length: 1.8M, Color: Black

Conductor: Copper

Outer material: PVC



CABLE-DP-HDMI-1.8-WL

Well



Displayport Cable

Connector1: Displayport Male

Connector2: Displayport Male

Resolution: 1080p

Connector: Straight, Gold plated

Cable length: 2M, Color: Black

Conductor: Copper

Outer material: PVC



CABLE-DPM/DPM-2BK-WL

Well



Displayport Cable

Connector1: Displayport Male

Connector2: Displayport Male

Resolution: 1080p

Connector: Straight, Gold plated

Cable length: 3M, Color: Black

Conductor: Copper

Outer material: PVC



CABLE-DPM/DPM-3BK-WL

Well



Mini Displayport to HDMI Cable

Connector1: mini Displayport Male

Connector2: HDMI Male

Resolution: 4K 60Hz active

Connector: Straight, Gold plated

Cable length: 1.8M, Color: Black

Conductor: Copper

Outer material: PVC



CABLE-MDP-HDMI-1.8-WL

Displayport to HDMI Cable

Connector1: Displayport Male

Connector2: HDMI Male

Resolution: 1080p

Connector: Straight, Gold plated

Cable length: 2M, Color: Black

Conductor: Copper

Outer material: PVC

Signal Transmission: From Displayport to HDMI, it doesn't work in the opposite direction



CABLE-DPM/HDMIM-2BK-WL

Well



Displayport to HDMI Cable

Connector1: Displayport Male

Connector2: HDMI Male

Resolution: 1080p

Connector: Straight, Gold plated

Cable length: 3M, Color: Black

Conductor: Copper

Outer material: PVC

Signal Transmission: From Displayport to HDMI, it doesn't work in the opposite direction



CABLE-DPM/HDMIM-3BK-WL

Audio - Video

Converters

Well



HDMI - VGA + Stereo Full HD Converter

Transform digital video signal into analog video signal. It separates the audio signal and converts it into an analog stereo signal. Automatically detects resolution.

Signal input: HDMI

Video Output: VGA

Resolution: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p

Video Amplifier Bandwidth: 2.25Gbps / 225MHz

Power supply: 5V DC, Power consumption: 5W



CONV-HDMI-VGAST-WL

Well



VGA + Stereo - HDMI Full HD Converter

Transform analog video signal into digital video signal. Includes 3.5mm audio input for audio signal transfer at digital output.

Signal input: VGA

Input Video signal: 0.5-1.0 V p-p

Video Output: HDMI

Resolution: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p

Video Amplifier Bandwidth: 1.65Gbps / 165MHz

Power supply: 5V DC, Power consumption: 5W



CONV-VGAST-HDMI-WL

Well



Digital to Analog Audio Converter

Converts digital audio (optical/ electrical) & coaxial to analog (2 RCA jacks).

Power supply: DC 5V

Input: Toslink + Coax

Output: analog 2x RCA



CONV-DIG/AN-WL

Splitters

Well



Full HD HDMI Splitter

1x HDMI input

Resolution: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p

Support 3D

Video Amplifier Bandwidth: 2.25Gbps/225MHz

Input video signal: 0.5 1.0 V p-p

Power supply: 5V DC

Output: 4x HDMI



SPLT-HDMI1.3/4-WL

Output: 8x HDMI



SPLT-HDMI1.3/8-WL

Well



4K HDMI Splitter

1x HDMI input

Resolution: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p,

4K/30Hz

Support 3D

Video Amplifier Bandwidth: 3.4Gbps/340MHz

Input DDC signal: 5 V p-p (TTL)

Power consumption: 5W

Output: 2x HDMI



SPLT-HDMI1.4/2-WL

Output: 4x HDMI



SPLT-HDMI1.4/4-WL

Output: 8x HDMI



SPLT-HDMI1.4/8-WL

Switches

Well



HDMI Full HD Switch

2x HDMI input/ 1x HDMI output

Resolution: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p

Support 3D

Video Amplifier Bandwidth: 2.5Gbps/250MHz

Input DDC signal: 5 V p-p (TTL)

Power consumption: 5W (max)



SW-HDMI1.3/2-WL

Well



HDMI Full HD Switch + RC

3x HDMI input/ 1x HDMI output

Resolution: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p

Support 3D

Video Amplifier Bandwidth: 2.5Gbps/250MHz

Input DDC signal: 5 V p-p (TTL)

Power consumption: 5W (max)

Content: switch, remote control, IR extender receiver



SW-HDMI1.3/3-RC-WL

Well



HDMI Full HD Switch + RC

4x HDMI input/ 1x HDMI output

Resolution: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p

Support 3D

Video Amplifier Bandwidth: 2.5Gbps/250MHz

Input DDC signal: 5 V p-p (TTL)

Power consumption: 5W (max)

Content: switch, remote control, IR extender receiver



SW-HDMI1.3/4-RC-WL

Audio - Video

Well



4K HDMI Switch + RC

3x HDMI input/ 1x HDMI output
Resolution: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p,
4Kx2K/30Hz
Support 3D
Video Amplifier Bandwidth: 3.0Gbps/300MHz
Input DDC signal: 5 V p-p (TTL)
Input TMDS signal: 0.5-1.0 V p-p
Power supply: 5V DC
Power consumption: 5W (max)



SW-HDMI1.4/3-RC-WL

Extenders

Well



Full HD HDMI Extender

HDMI extender by cat.5e/6 with Pigtail
Transmission distance: 30M/1080p
Resolution: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Support 3D
Video Amplifier Bandwidth: 1.65Gbps/165MHz
Input DDC signal: 5 V p-p (TTL)
Input TMDS signal: 0.5-1.0 V p-p
Power supply: power over HDMI
Power consumption: 5W (max)

.....
Cable length: 30m



EXT-HDMI1.3/30M-WL

.....
Cable length: 60m



EXT-HDMI1.3/60M-WL

Repeater

Well



4K HDMI Repeater

1x HDMI input/ 1x HDMI output
Resolution: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p,
4K/30Hz
Support 4K, Works up to 35M
Video Amplifier Bandwidth: 3.4Gbps/340MHz
Power supply: microUSB power cable
Power consumption: 1.5W



REP-HDMI1.4/35M-WL

Voltage Regulators



Automatic Voltage Regulator

Input voltage AC: 150V-260V
Output voltage AC: 230V
Output accuracy without load: $\pm 3\%$
Noise level: $\approx 56\text{dB}$
Protection: Low Output Voltage, Overvoltage, Overheating, Short Circuit
Protection class: I; IP20
Power factor: 0.6
Power: 500VA/300W



AVR-SRV-SECURE500-WL

Power: 1000VA/600W



AVR-SRV-SECURE1000-WL

Power: 2000VA/1200W



AVR-SRV-SECURE2000-WL



Automatic Voltage Regulator

Power: 500VA/300W
Input voltage AC: 150V-250V
Output voltage AC: 220V
Output frequency: Synchronized with the network
Output accuracy without load: $\pm 3\%$
Power factor: 0.6
Protection: Low Output Voltage, Overvoltage, Overheating, Overload, Short Circuit



AVR-SRV-SPRY500BK-WL

Well



Automatic Voltage Regulator

Power: 1000VA/600W
Input voltage AC: 150V-250V
Output voltage AC: 220V
Output frequency: Synchronized with the network
Output accuracy without load: $\pm 3\%$
Power factor: 0.6
Protection: Low Output Voltage, Overvoltage, Overheating, Overload, Short Circuit
Color: Black



AVR-SRV-SPRY1000BK-WL

Color: White



AVR-SRV-SPRY1000WE-WL

Regulators with TRIAC

Well



Automatic Voltage Regulator

Input voltage AC: 140V-250V
Output voltage AC: 230V
Output accuracy without load: $\pm 4\%$
Operating temperature: -10°C - 40°C
Protection: Low Output Voltage, Overvoltage, Overheating, Short Circuit
Protection class: I; IP20
Power factor: 0.7
Power: 1000VA/700W



AVR-TRC-AGILE1000-WL

Power: 2000VA/1400W



AVR-TRC-AGILE2000-WL

Power: 3000VA/2100W



AVR-TRC-AGILE3000-WL

Power: 5000VA/3500W



AVR-TRC-AGILE5000-WL

Power: 10000VA/7000W



AVR-TRC-AGILE10000-WL

Emergency power supply

UPS for Heating Stations

Well



UPS for Heating Stations

Input voltage: 150-280V AC
Power factor: 1
Pure sine wave
External battery voltage: 12V
With bypass

Power: 230V/300W
Adjustable charging current: up to 15A



UPS-HEATST-CommANDER300W-WL

Power: 230V/600W
Adjustable charging current: up to 30A



UPS-HEATST-CommANDER600W-WL

Power: 230V/1000W
Adjustable charging current: up to 40A



UPS-HEATST-CommANDER1000W-WL

Power: 230V/1600W External
battery voltage: 24V
Adjustable charging current: up to 40A



UPS-HEATST-CommANDER1600W-WL

Well



UPS for Heating Stations with Solar Controller

Power: 230V/1000W
Input voltage: 156-294V AC
External battery voltage: 12V
Adjustable charging current: up to 40A With
bypass



UPS-HEATST-EVOLUTION1000W-WL

Well



UPS for Heating Stations

Input voltage: 156-294V AC
External battery voltage: 12V
With bypass

Power: 230V/300W
Adjustable charging current: up to 15A



UPS-HEATST-SPRINTEN300W-WL

Power: 230V/600W
Adjustable charging current: up to 30A



UPS-HEATST-SPRINTEN600W-WL

Well



UPS for Heating Stations

Input voltage: 140-275V AC
Output: USB 5V DC
Power factor: 0.6
Pure sine wave
External battery voltage: 12V Adjustable
charging current: up to 15A

Power: 300VA/180W



UPS-HEATST-STEADY300VA-WL

Power: 500VA/300W



UPS-HEATST-STEADY500VA-WL

Power: 800VA/480W



UPS-HEATST-STEADY800VA-WL

Power: 1500VA/900W



UPS-HEATST-STEADY1500VA-WL

Line Interactive (UPS's)

Well



UPS line-interactive

Battery: 12V/7Ah
Output: 2 x Schuko

Power: 650VA/360W
Input voltage: 160-290V AC
Transfer time: 10ms



UPS-LINT-STARK650-WL

Power: 850VA/480W
Input voltage: 230V AC
Battery: 12V/9Ah Transfer
time: 2-6ms



UPS-LINT-STARK850-WL

Power: 1200VA/720W
Input voltage: 230V AC
Battery: 12V/7Ah x 2
Transfer time: 6-10ms



UPS-LINT-STARK1200-WL

Prolongers

Standard Extension Sockets



Well

Extension Socket

Sockets: 3 x Schuko, with contact protection
Cable: H05W-F 3Gx1.5mm²
Max: 16A, 250V, 3500W
IP20

Cable length: 1,5M



EXTS-3S1.5M/02-WL

Cable length: 3M



EXTS-3S3M/02-WL

Cable length: 5M



EXTS-3S5M/02-WL



Well

Extension Socket

3 Schuko sockets
Length: 3M
Cable: H05VV-F 3G 1.5mm²
Max: 16A, 250V ~ 50Hz, 3680W
Color: White
Protection: IP20



EXTS-3S3M/03-WL



Well

Extension Socket

Cable length: 1.5M
Cable: H05VV-F 3Gx1.5mm²
Sockets: 3 Schuko
Max: 16A, 250V, 3500W
IP20- for internal use
Color: Black



EXTS-3S1.5M/BK-WL



Well

Extension Socket with Switch

Sockets: 3 x Schuko, switch and child protection
Cable: H05W-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 1,5M



EXTS-3S1.5M-SW/02-WL

Cable length: 3M



EXTS-3S3M-SW/02-WL

Cable length: 5M



EXTS-3S5M-SW/02-WL



Well

Extension Socket With Switch

3 Schuko sockets
Cable length: 5M
Cable: H05VV-F 3G 1.5mm²
Max: 16A, 250V ~ 50Hz, 3680W
Color: White
Protection: IP20



EXTS-3S5M-SW/03-WL



Well

Extension Socket with Switch

Sockets: 3 x Schuko, switch and child protection
Cable: H05W-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 1.5M



EXTS-3S1.5M-SW-WL

Cable length: 3M



EXTS-3S3M-SW-WL

Cable length: 5M



EXTS-3S5M-SW-WL



Well

Extension Socket With Switch

Cable length: 3M
Sockets: 3
Contact protection
Cable: H05VV-F 3G 1.5mm²
Max: 16A,
250V ~ 50Hz, 3500W
Color: Black, IP20



EXTS-3S3M-SW/02BK-WL



Well

Extension Socket

Cable length: 3M
Sockets: 3 x Schuko, with contact protection
2 USB ports 2X1.05A, for fast charging of devices,
which can also be charged via USB cable



EXTS-3S3M-USB/01-WL

Prolongers

Well



Extension Socket

Sockets: 3 x Schuko, with contact protection
Cable: H05W-F 3Gx1.5mm²
Max: 16A, 250V, 3500W
IP20

Cable length: 1,5M



EXTS-3S1.5M-WL

Cable length: 3M



EXTS-3S3M-WL

Cable length: 5M



EXTS-3S5M-WL

Well



Extension Socket

Sockets: 3
with contact protection
Cable: H05VV-F 3G 1.5mm²
Max: 16A,
250V ~ 50Hz, 3500W
Color: Black, IP20

Cable length: 3M



EXTS-3S3M/02BK-WL

Cable length: 5M



EXTS-3S5M/02BK-WL

Well



Extension Socket

3 Schuko sockets
Cable: H05VV-F 3G 1.5mm²
Max: 16A, 250V ~ 50Hz, 3500W
Color: White
Protection: IP20

Cable length: 7M



EXTS-3S7M-WL

Cable length: 10M



EXTS-3S10M-WL

Well



Extension Socket

Sockets: 4 x Schuko, child protection
Cable: H05W-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 1.5M



EXTS-4S1.5M/02-WL

Cable length: 3M



EXTS-4S3M/02-WL

Cable length: 5M



EXTS-4S5M/02-WL

Well



Extension Socket with Switch

Sockets: 4 x Schuko, switch and child protection
Cable: H05W-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 1.5M



EXTS-4S1.5M-SW/02-WL

Cable length: 3M



EXTS-4S3M-SW/02-WL

Cable length: 5M



EXTS-4S5M-SW/02-WL

Well



Extension Socket with Switch

Sockets: 4 x Schuko, switch and child protection
Cable: H05W-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 1.5M



EXTS-4S1.5M-SW-WL

Cable length: 3M



EXTS-4S3M-SW-WL

Cable length: 5M



EXTS-4S5M-SW-WL

Prolongers

Well



Extension Socket

Sockets: 4 x Schuko, child protection
Cable: H05W-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 1.5M



EXTS-4S1.5M-WL

Cable length: 3M



EXTS-4S3M-WL

Cable length: 5M



EXTS-4S5M-WL

Well



Extension Socket

Sockets: 5 x Schuko, child protection
Cable: H05VV-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 3M



EXTS-5S3M/02-WL

Cable length: 5M



EXTS-5S5M/02-WL

Well



Extension Socket

5 Schuko sockets
Cable length: 5M
Cable: H05VV-F 3G 1.5mm²
Max: 16A, 250V ~ 50Hz, 3680W
Color: White
Protection: IP20



EXTS-5S5M/03-WL

Well



Extension Socket with Switch

Sockets: 5 x Schuko, switch and child protection
Cable: H05W-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 3M



EXTS-5S3M-SW/02-WL

Cable length: 5M



EXTS-5S5M-SW/02-WL

Well



Extension Socket with Switch

Sockets: 5 x Schuko, switch and child protection
Cable: H05VV-F 3G 1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 3M



EXTS-5S3M-SW-WL

Cable length: 5M



EXTS-5S5M-SW-WL

Well



Extension Socket

Sockets: 5 x Schuko, child protection
Cable: H05VV-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 3M



EXTS-5S3M-WL

Cable length: 3M



EXTS-5S5M-WL

Well



Extension Socket

Sockets: 6 x Schuko, child protection
Cable: H05W-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 3M



EXTS-6S3M/02-WL

Cable length: 5M



EXTS-6S5M/02-WL

Well



Extension Socket with Switch

Sockets: 6 x Schuko, switch and child protection
Cable: H05W-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 3M



EXTS-6S3M-SW/02-WL

Cable length: 5M



EXTS-6S5M-SW/02-WL

Prolongers

Well



Extension Socket with Switch

Sockets: 6 x Schuko, switch and child protection
Cable: H05W-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 3M



EXTS-6S3M-SW-WL

Cable length: 5M



EXTS-6S5M-SW-WL

Well



Extension Socket

Cable length: 3M
Sockets: 6 x Schuko, child protection
Cable: H05W-F 3Gx1.5mm
Voltage: 250V
Maximum current: 16A
Power: 3500W



EXTS-6S3M-WL

Cable length: 5M



EXTS-6S5M-WL

Extension Sockets with Protection

Well



Extension Socket with Protection

Sockets: 3 x Schuko, child protection
Cable: H05W-F 3Gx1.5mm
Protection: overload and overvoltage
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 3M



EXTS-3S3M-PROT/03-WL

Cable length: 5M



EXTS-3S5M-PROT/03-WL

Well



Extension Socket with Protection

Sockets: 4 x Schuko, child protection
Cable: H05W-F 3Gx1.5mm
Protection: overload and overvoltage
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 3M



EXTS-4S3M-PROT/02-WL

Cable length: 5M



EXTS-4S5M-PROT/02-WL

Well



Extension Socket with Protection

Cable length: 3M
Sockets: 4 x Schuko, child protection
Cable: H05W-F 3Gx1.5mm
Protection: overload and switch
Voltage: 250V
Maximum current: 16A
Power: 3500W
4 individual switches



EXTS-4S3M-PROTO/4SW-WL

Well



Extension Socket with Protection

Sockets: 5 x Schuko, child protection
Cable: H05W-F 3Gx1.5mm
Protection: overload and overvoltage
Voltage: 250V
Maximum current: 16A
Power: 3500W

Cable length: 3M



EXTS-5S3M-PROT/03-WL

Cable length: 5M



EXTS-5S5M-PROT/03-WL

Well



Extension Socket with Protection

Sockets: 6 x Schuko, child protection
Cable: H05W-F 3Gx1.5mm
Protection class: IP20

Cable length: 3M



EXTS-6S3M-PROT/02-WL

Cable length: 5M



EXTS-6S5M-PROT/02-WL

Prolongers

Flexible Extension Sockets

Well



Flexible Extension Socket

Sockets: 5 x

Schuko

Cable: H05VV-F 3G 1.5mm²

Max: 16A, 250V ~ 50Hz, USB: 2.1A/ 5VDC

Color: White, IP20

.....
Cable length: 3M



EXTSR-5S3M-USB-WL

.....
Cable length: 5M



EXTSR-5S5M-USB-WL



Plugs & couplings

Wall Plugs

Well



Wall Plug with Protection

1 x Schuko
Rated voltage: 250V
Current: 16A
Material fireproof



ELAD-SH-PROT/01-WL

Well



Double Schuko Wall Plug

2 x Schuko
Rated voltage: 230V
Current: 16A
Material fireproof



ELAD-2SH/01-WL

Well



Double Schuko Wall Plug with Switch

2 x Schuko
With contact protection & switch
Material: Polycarbonate
Max 2x16A/250V



ELAD-2SH-SW-WL

Well



Schuko Wall Plug with Protection at Low & High Voltage

Maximum output current: 15A
Voltage range: 165V-250V
Green LED indicator: works at normal limits
Yellow LED indicator: Low-VP voltage is less than 165V
Red LED indicator: High-VP voltage is greater than 250V



ELAD-SH-PROT/VS-WL

Well



Triple Wall Plug

Sockets: 3 x Schuko
With contact protection
16A, 250V, IP20
Color: White



ELAD-3SH/01-WL

Well



Triple Wall Plug

Sockets: 3 Schuko
With contact protection
16A, 250V, IP20
Color: White



ELAD-3SH/02-WL

Well



Mixed Triple Wall Plug

1 x Schuko + 2 x EURO
Rated voltage: 230V
Current: 16A



ELAD-2EU1SH-WL

Plugs & couplings

Plugs & Tips

Well



Plug Without Contact Protection

Plug: Male
Type: Euro
Output: Straight
Current max: 16A
Color: White
Protection class: IP20



ELPL-EU-02WH-WL

Well



Plug With Contact Protection

Plug: Male
Type: Schuko
Output: Straight
Current max: 16A
Color: White
Protection class: IP20



ELPL-SH-02WH-WL

Well



Plug With Contact Protection

Plug: Male
Type: Schuko
Output: Lateral
Current max: 16A
Color: White
Protection class: IP20



ELPL-SH-03WH-WL

Well



Plug Without Contact Protection

Plug: Female
Type: Euro
Output: Straight
Current max: 16A
Color: White
Protection class: IP20



ELSO-EU-02WH-WL

Well



Plug With Contact Protection

Plug: Female
Type: Schuko
Output: Straight with gripping ring
Current max: 16A
Color: White
Protection class: IP20



ELSO-SH-02WH-WL

Well



Plug With Contact Protection

Plug: Female
Type: Schuko
Output: Lateral with gripping ring
Current max: 16A
Color: White
Protection class: IP20



ELSO-SH-03WH-WL

Plug-in Power Usage Monitors

Well



Plug-in Power Usage Monitor

Power supply: 230V, 50HZ, 16AH
Maximum load: 3680W
Measuring range: 0.0-9999.99kWh
Voltage measurement accuracy: +/- 1%
Protection class: IP20



ELPM-02-WL

Well



Plug-in Power Usage Monitor

Power supply: 230V, 50HZ, 16AH
Maximum load: 3680W
Measuring range: 0.0 - 9999.99kWh
Minimum Power Display: 0.1W
Protection class: IP20



ELPM-03-WL

Plugs & couplings

Programmable Plugs

Well



Wi-Fi RC Plug

Power supply: 230V AC, 50Hz, max.: 16(2)A
Maximum load: 3600W
Transmission frequency: 433.92MHz
Remote control power supply: 2 x AAA, 1.5V
Protection class: IP20



ELAD-SH/RC-WL

Programmable Timers

Well



Programmable Digital Timer

Power supply: 220-240, 50Hz, 16000mAh, 3500W
Schedule: Every day of the month
Protection class: IP20
Designed for indoor



TIMER-DIG-10-WL



Programmable Mechanical Timer

Power supply: 220-240, 50Hz, 1600mAh, 3500W
Schedule: for 24h
Protection class: IP20
Designed for indoor



TIMER-MEC-01-WL



Programmable Mechanical Timer

Power supply: 220-240, 50Hz, 16000mAh, 3500W
Schedule: for 24h
Protection class: IP44
Designed for outdoor



TIMER-MEC-05-WL

Wall Plugs

Well



Keystone-free Wall Socket

Ports: 1
No Keystone Jack
Mounting: on surface
Color: White



LANBOX-SM-1P-WL



Simple FTP Socket

For shielded Cat5 cable
Simple FTP Socket
Mounting: on surface

.....
For shielded Cat5 cable



LANBOX-SM-F5-WL

.....
For shielded Cat6 cable



LANBOX-SM-F6-WL



Simple UTP Socket

Simple UTP Socket
Mounting: on surface
Material: ABS

.....
For unshielded Cat5 cable



LANBOX-SM-U5-WL

.....
For unshielded Cat6 cable



LANBOX-SM-U6-WL

Plugs & couplings

Well



Keystone-free Wall Socket

Ports: 2
No Keystone Jack
Mounting: on surface
Color: White



LANBOX-SM-2P-WL

Well



Double FTP Socket

For shielded Cat5 cable
Double FTP Socket
Mounting: on surface

For shielded Cat5 cable



LANBOX-SM-F5X2-WL

For shielded Cat6 cable



LANBOX-SM-F6X2-WL

Well



Double UTP Socket

Double UTP Socket
Mounting: on surface
Material: ABS

For unshielded Cat5 cable



LANBOX-SM-U5X2-WL

For unshielded Cat6 cable



LANBOX-SM-U6X2-WL

Well



Keystone Jack Cat6

For Cat6 8P8C cable, shielded



LANKJ-F6-WL

Well



Keystone Jack Cat5

Color: White

For Cat5e 8P8C cable, unshielded



LANKJ-U5-WL

For Cat6 8P8C cable, unshielded



LANKJ-U6-WL

Well



RJ45 Socket Cover

Ports: 1
No Keystone
Dimension: 86 x 86mm
Color: White



LANWP-1P-WL

Well



RJ45 Socket Cover

Ports: 2
No Keystone
Dimension: 86 x 86mm
Color: White



LANWP-2P-WL

CONTACT:

 TIMISOARA, General Ion Dragalina street 15

 Klagenfurt am Wörthersee, Wladblickweg 7H

 office@vgs.com.ro



+40 722 400 234
+43 664 994 90 960